

Best Available Copy



Rec'd PCT/PTO 11 FEB 2005  
PCT/GB 2003 7 0 0 3 6 4 5

10/524364  
INVESTOR PEOPLE

The Patent Office

Concept House

Cardiff Road

Newport NP23 6 4 5  
South Wales

NP10 8000 PCT

## PRIORITY DOCUMENT


SUBMITTED OR TRANSMITTED IN  
COMPLIANCE WITH RULE 17.1(a) OR (b)

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

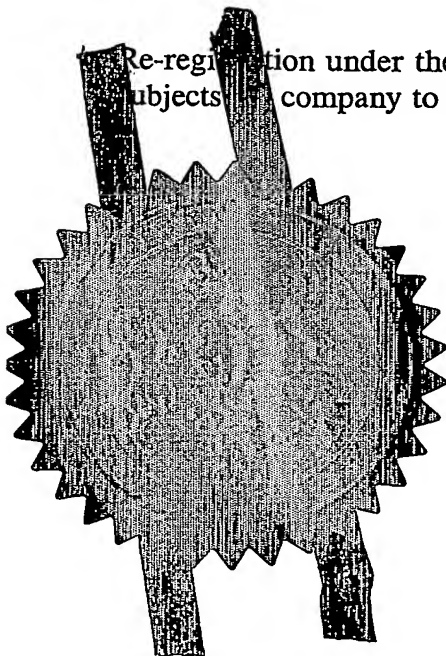

Signed

*W. Evans*

Dated

8 September 2003

THE PATENT OFFICE  
G  
29 AUG 2002

The  
Patent  
Office

1/77

**Request for grant of a patent**

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

The Patent Office

Cardiff Road  
Newport  
South Wales  
NP9 1RH

1. Your reference  
57.0452 GB NP  
29 AUG 2002
2. Patent application number  
(The Patent Office will fill in this part)  
0220006.1  
29AUG02 E744325-1 D02831  
P01/7700 0.00-0220006.1
3. Full name, address and postcode of the or of each applicant (underline all surnames)  
Schlumberger Holdings Limited  
P.O. Box 71  
Craigmuir Chambers  
Road Town  
Tortola  
British Virgin Islands  
Patents ADP number (if you know it)  
British Virgin Islands  
If the applicant is a corporate body, give the country/state of its incorporation  
7236326001
4. Title of the invention  
DELAYED-GELATION SOLUTION
5. Name of your agent (if you have one)  
"Address for service" in the United Kingdom to which all correspondence should be sent (Including the postcode)  
Christophe MACQUET  
Intellectual Property Law Department  
Schlumberger Cambridge Research Limited  
High Cross  
Madingley Road  
Cambridge CB3 0EL  
United Kingdom  
Patents ADP number (if you know it)  
8086829001
6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number  

Country	Priority application number (if you know it)	Date of filing (day / month / year)
7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application  

Number of earlier application	Date of filing (day / month / year)
8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if:  
 a) any applicant named in part 3 is not an inventor, or  
 b) there is an inventor who is not named as an applicant, or  
 c) any named applicant is a corporate body.  
 See note (d))  
 YES

# Patents Form 1/77


9. Enter the number of sheets for each of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form -

Description 30

Claim(s) 3

Abstract 1

Drawing(s) 24 + 2 

10. If you are also filing any of the following, state how many against each item.

Priority documents -

Translations of priority documents -

Statement of inventorship and right to grant of a patent (Patents Form 7/77) -

Request for preliminary examination and search (Patents Form 9/77) 1

Request for substantive examination (Patents Form 10/77) 1

Any other documents -  
(please specify)

11. I/We request the grant of a patent on the basis of this application.

Signature

Date

28 August 2002

12. Name and daytime telephone number of person to contact in the United Kingdom  
Christophe MACQUET  
01223 325268

## Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

## Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- Once you have filled in the form you must remember to sign and date it.
- For details of the fee and ways to pay please contact the Patent Office.

DELAYED-GELATION SOLUTION

Field of the Invention

5       The present invention relates to delayed-gelation solutions, and has applications for the treatment of hydrocarbon wells.

Background of the Invention

10

During the production of hydrocarbons from underground formations, it is often desirable to reduce the permeability of certain zones in the formation. This is the case, for example, when a formation next to the production well is likely to direct water into the well. Another example is where there are zones of high permeability next to the injection well.

One method of reducing the permeability of an underground zone entails introducing into the zone a fluid with the intrinsic potential of creating a gel by precipitation of a solid phase. Typically it is necessary to control two parameters, which are the delay required for the formation of the gel, and the morphology of the solid phase that is produced during gelation; the delay determines the possible degree of penetration into the formation, while the morphology of the solid phase determines the degree to which the permeability of the formation will be reduced.

Numerous simple salts of aluminium III (such as aluminium chloride or aluminium nitrate) are soluble in slightly acid mediums, but form insoluble aluminum hydroxides when the pH level goes above about 5. Delayed formation gels based on such hydroxides can be generated from solutions consisting of a suitable aluminium salt and an activator. For example, the activator is used to slowly increase the pH level of the



solution in the temperature range normally existing at well bottoms, and this in turn leads to the delayed formation of an insoluble hydroxide phase. A suitable activator is urea, which undergoes hydrolysis at high temperature, with formation of ammonia; the latter in turn increases the pH of the solution. The solid aluminium hydroxide precipitate phase has a tendency to stay amorphous, with the consistency of a gel.

US Patent No. 4,889,563 describes a composition in which aluminium hydroxychloride is used instead of aluminium chloride, providing various operational advantages. The activator for the composition is urea, urea derivative or hexamethylene-tetramine.

US Patent No. 3,730,272 also describes inorganic gelling fluids for reducing permeability to modify an injection profile. The fluids comprise polyvalent metal salts that form gelatinous metal hydroxides or hydrated metal oxides of very low water solubility. The patent mentions the use of a range of polyvalent metals including aluminium, chromium, iron, copper and bismuth, such metals being used in the form of water-soluble salts such as chlorides, nitrates or acetates. However, the examples focus on the use of aluminium chloride. A pH-increasing reactant such as urea is used to trigger gelation/precipitation and, for applications in the lower temperature range, a water-soluble nitrite salt is used to accelerate the gelation/precipitation process.

The use in hydrocarbon well applications of gelling systems based on sodium silicate solutions is also known. See for example, P.H. Krumine and S.D. Boyce, "Profile modification and water control with silica gel-based systems", SPE 13578, 1985; D.D. Sparlin and R.W. Hagen, "Controlling water in producing operations", *World Oil*, June 1984; and J.K. Borchardt, "In-situ gelation of silicates in drilling, well completion and oil production", *Colloids and Surfaces*, Vol. 63, 189, (1992).

R.S. Seright and J. Liang, "A comparison of different types of blocking agents", *SPE 30120*, pp 431-440, reviews issues of placement and permeability reduction in respect of various fluid diversion processes. R.S. Seright, "Improved  
5 Techniques for fluid diversion in oil recovery processes", Second annual report DOE/BC/14880-10, US DOE, Feb 95, develops theoretical models relating to the feasibility of using particles to prevent gelant penetration into low permeability zones during placement.

10  
Summary of the Invention

An object of the present invention is to provide delayed-gelation systems for selective placement in well formation  
15 zones and/or with improved gel strength and stability.

In general terms the present invention provides an inorganic delayed-gelation solution which contains suspended inorganic particles. In use, the solution is activated to form a gel.

20 We have found that suitable delayed-gelation solutions may be based on dissolved metal salts. Thus, more specifically, in a first aspect the present invention provides an aqueous delayed-gelation solution comprising a dissolved metal salt which, in use, hydrolyses to form a gel, wherein  
25 the solution contains suspended inorganic particles.

In such a system, the dissolved metal salt and suspended inorganic particles can be selected such that the inorganic particles are compatible with the solution and/or with the gel formed from the solution. For example, in preferred  
30 embodiments the inorganic particles are chemically stable with respect to the solution and the gel. In further preferred embodiments, the particles are physically stable, e.g. so that they remain suspended and do not flocculate in the solution.

Preferably, the dissolved metal salt is a polyvalent

metal salt, and more preferably an aluminium salt such as an aluminium halide or a hydrated aluminium halide. The gelation times of solutions based on such salts can be readily controlled, e.g. by use of suitable activators. Indeed, preferably, the solution further comprises a hydrolisation activator, such as a pH-increasing reactant. A typical such reactant is urea or urea derivative.

Alternatively, the dissolved metal salt may be e.g. a sodium silicate.

We have been able to identify compatible inorganic particles for use with various delayed gelation solutions. For example, for use with delayed gelation solutions based on aluminium salts, the suspended inorganic particles may be formed from alumina or aluminium hydrate, or have alumina or aluminium hydrate coatings. Conversely, for use with delayed gelation solutions based on sodium silicate, the suspended inorganic particles may be formed from silica or have silica coatings.

Furthermore, we have performed experiments which show that careful selection of the particle size distribution of the suspended inorganic particles enables the particles to block penetration of the delayed-gelation solution into low permeability rock formations. In this way, the delayed gelation solution can be selectively placed in higher permeability target formation zones. Essentially, the suspended inorganic particles should block fluid flow into low permeability zones by forming filter cake on the well bore rock face of the low permeability zones and/or by forming crossflow barriers at the interface between the low and high permeability zones.

We have also found that the suspended inorganic particles can strengthen and stabilise the gel formed from the solution. In particular, significant gel strengthening can be achieved when the particles are elongate, i.e. rod- or needle-shaped.

Thus in one embodiment the particles are elongate.

Preferably, the particles have a mean aspect ratio of at least 8, and more preferably of at least 16, the degree of gel strengthening tending to increase with aspect ratio.

5        Conveniently, the elongate particles may be boehmite needles. Such needles are compatible with delayed gelation solutions based on aluminium salts. However, for use with delayed gelation solutions based on sodium silicate, the needles may be coated with silica.

10        A further aspect of the present invention provides for the use of the delayed-gelation solution of the first aspect for treating a hydrocarbon well.

Another aspect of the present invention provides a method of selectively placing a delayed-gelation solution in a  
15        hydrocarbon well, the method comprising the steps of:

      providing the aqueous delayed-gelation solution of the first aspect, and

      injecting the solution into the hydrocarbon well, whereby the suspended inorganic particles reduce or block the flow of  
20        the delayed-gelation solution to relatively low permeability formation zones thereby selectively placing the solution in a relatively high permeability formation zone.

Another aspect of the present invention provides a method of reducing the permeability of a formation zone of a  
25        hydrocarbon well, the method comprising the steps of:

      providing the aqueous delayed-gelation solution of the first aspect,

      placing the solution in the formation zone, and

      allowing the dissolved metal salt to hydrolyse, thereby  
30        forming a gel which contains suspended inorganic particles and which reduces the permeability of the zone.

#### Brief Description of the Drawings

Embodiments of the present invention will now be described, by way of example only, with reference to the accompanying drawings, in which:

Fig. 1 shows measurements of the zeta potential of colloidal alumina, Ludox CL12 and colloidal silica particles as a function of pH,

Fig. 2 is a graph showing the turbidities of aqueous solutions containing: (1) 0.1 vol% colloidal silica ("negatively charged silica"), (2) 0.1 vol% alumina-coated colloidal silica ("CL"), and (3) 4 wt%  $\text{Al}_2\text{OHCl}_5 \cdot 2.5\text{H}_2\text{O}$  ("DGS" - delayed gelling system) against concentration of potassium chloride (KCl) in the solutions,

Fig. 3 is a graph showing the turbidities of 0.27 M and 2.7 M KCl aqueous solutions containing: (1) 0.1 vol% alumina-coated colloidal silica ("CL"), and (2) 4 wt%  $\text{Al}_2\text{OHCl}_5 \cdot 2.5\text{H}_2\text{O}$  ("DGS") against sulphate concentration in the solutions,

Fig. 4 is a graph showing the turbidities of 2.7 M KCl aqueous solutions containing: (1) 0.1 vol% alumina-coated colloidal silica ("CL"), (2) 4 wt%  $\text{Al}_2\text{OHCl}_5 \cdot 2.5\text{H}_2\text{O}$  ("DGS"), and (3) 0.1 vol% alumina-coated colloidal silica and 4 wt%  $\text{Al}_2\text{OHCl}_5 \cdot 2.5\text{H}_2\text{O}$  ("CL + DGS") against carbonate concentration in the solutions,

Fig. 5 is a graph showing the gel strengths against time of aqueous solutions containing: (1) 1 wt%  $\text{Al}_2\text{OHCl}_5 \cdot 2.5\text{H}_2\text{O}$  and 3 wt% urea ("1G + 3U"), (2) 3 wt%  $\text{Al}_2\text{OHCl}_5 \cdot 2.5\text{H}_2\text{O}$  and 3 wt% urea ("3G + 3U"), (3) 1 wt%  $\text{Al}_2\text{OHCl}_5 \cdot 2.5\text{H}_2\text{O}$ , 3 wt% urea and 1 wt% alumina-coated colloidal silica ("1G + 3U + 1 wt% CL"), and (4) 1 wt%  $\text{Al}_2\text{OHCl}_5 \cdot 2.5\text{H}_2\text{O}$ , 3 wt% urea and 2 wt% alumina-coated colloidal silica ("1G + 3U + 2 wt% CL"), each solution also containing 2 wt% KCl and being maintained at 75°C,

Fig. 6 is a graph showing the gel strengths against time of aqueous solutions containing: (1) 3 wt%  $\text{Al}_2\text{OHCl}_5 \cdot 2.5\text{H}_2\text{O}$  and 1 wt% 1,3-dimethyl urea ("Control"), (2) 3 wt%  $\text{Al}_2\text{OHCl}_5 \cdot 2.5\text{H}_2\text{O}$ ,

1 wt% 1,3-dimethyl urea and 1 wt% alumina-coated colloidal silica ("Control + 1 wt% CL"), and (3) 3 wt%  $\text{Al}_2\text{OHCl}_5 \cdot 2.5\text{H}_2\text{O}$ , 1 wt% 1,3-dimethyl urea and 2 wt% alumina-coated colloidal silica ("Control + 2 wt% CL"), each solution also containing  
 5 2 wt% KCl and being maintained at 90°C,

Fig. 7 is a graph showing permeability against uniaxial depth of flow for coreflood experiments on four sandstone cores (starting permeabilities 5, 60, 140 and 800 mD) and one limestone core (starting permeability 2000 mD), the "PV" value  
 10 associated with each core being the number of pore volumes of test fluid pumped through the core by the end of the respective coreflood experiment,

Fig. 8 is a graph showing the pore throat diameter distributions determined by mercury porosimetry of the 5 mD  
 15 and 800 mD sandstones used in the experiments of Fig. 7,

Fig. 9 is a graph showing permeability against time for coreflood experiments on three sandstone cores (starting permeabilities 5, 100-120 and 600-750 mD) and a core of packed sized sand grains (starting permeability 4300 mD), the  
 20 coreflood test fluids being 2 wt% KCl brines containing 0.1, 0.3 or 1 vol% Ludox CL12 particles,

Fig. 10 shows schematically cross flow barrier formation between high and low permeability layers,

Fig. 11 shows a transmission electron micrograph of the  
 25 boehmite rods of preparation BM1,

Fig. 12 shows a transmission electron micrograph of the boehmite rods of preparation BM2,

Fig. 13 shows a graph of gel strength code against ageing time at 71°C for three comparative example solutions,

Fig. 14 shows the graph of Fig. 13 superimposed with the  
 30 results for two solutions containing BM1 boehmite rods and also aged at 71°C,

Fig. 15 shows the graph of Fig. 13 superimposed with the results for two solutions containing BM2 boehmite rods and

also aged at 71°C,

Fig. 16 shows the graph of Fig. 13 superimposed with the results for two solutions containing CL coated silica particles and also aged at 71°C,

5 Fig. 17 shows a graph of amount of free water against ageing time for some of the solutions of Figs. 13 to 16,

Fig. 18 shows a graph of gel strength code against ageing time for two of the solutions of the graph of Fig. 13 aged at 71°C combined with results for the same two solutions aged at 10 89°C,

Fig. 19 shows a graph of gel strength code against ageing time combining the results for the two 89°C-aged solutions of Fig. 18 with the results of three solutions respectively containing BM1 boehmite rods, BM2 boehmite rods and CL coated 15 silica particles also aged at 89°C,

Fig. 20 shows a graph of amount of free water against ageing time for the solutions of Fig. 19,

Fig. 21 shows a graph of gel strength code against ageing time at 73°C for solutions having gelant concentrations in the 20 range 1 to 6wt% and constant gelant/activator (w/w) ratios of 2/3,

Fig. 22 shows a graph of vane yield stress against gelant concentration for the solutions of Fig. 21 aged for 18 hours at 73°C,

25 Figs. 23a and b show graphs of respectively gel strength code and vane yield stress against aging time at 73°C for solutions containing 2wt% gelant + particles and 3wt% activator,

30 Figs. 24a and b show graphs of respectively gel strength code and vane yield stress against aging time at 73°C for solutions containing 3wt% gelant + particles and 4.5wt% activator,

Figs. 25a and b show graphs of respectively gel strength code and vane yield stress against aging time at 73°C for

solutions containing 4wt% gelant + particles and 6wt% activator,

Fig. 26 shows a graph of gel strength code against aging time at 90°C for solutions containing gelant, 1,3-dimethyl urea activator and CL particles,

Fig. 27 shows a graph of gel time against molar ratio  $\text{SO}_4/\text{SiO}_2$  for silicate delayed gelation solutions aged at 20°C, and

Fig. 28 shows a graph of vane yield stress against aging time at 20°C for systems based on a silicate delayed-gelation solution.

#### Detailed Description

The present invention relates to a delayed-gelation solution laden with inorganic particles which are typically chemically compatible with the solution and with the gel which is formed from the solution.

A delayed-gelation system may be based on the controlled hydrolysis of aluminium species starting from an aqueous solution of aluminium chloride and/or aluminium chlorohydrate,  $\text{Al}_2(\text{OH})_m\text{Cl}_n$ , where  $m$  is in the range 4-5,  $n$  is in the range 1-2 and  $(m + n) = 6$ . For example, as described in US Patent No. 4,889,563, the pre-gel solution may contain the gelant component, together with a dissolved activator component (or a combination of activator components). The gelant material  $\text{Al}_2(\text{OH})_5\text{Cl}$  is commercially available e.g. as "Locron" ( $\text{Al}_2(\text{OH})_5\text{Cl} \cdot 2.5\text{H}_2\text{O}$ ) marketed by Hoescht A.G., Germany. The activator may be a weak organic base; some typical activators are sodium cyanate, urea and urea derivatives such as dialkyl ureas.

A freshly prepared pre-gel solution of  $\text{Al}_2(\text{OH})_5\text{Cl}$ , should have a molar ratio  $[\text{OH}]/[\text{Al}] = 2.5$  and a pH in the range 4-4.5. As the activator component(s) decompose, via acid



hydrolysis reactions; the molar ratio  $[\text{OH}]/[\text{Al}]$  and the pH of the solution increase. When  $[\text{OH}]/[\text{Al}] = 2.6$ , aggregates of the predominant polynuclear species,  $[\text{Al}_{13}\text{O}_4(\text{OH})_{24}(\text{H}_2\text{O})_{12}]^{7+}$  (radius of gyration 0.41 nm, G. Johansson, "The crystal structure of a basic aluminium selenate", *Ark. Kemi.*, Vol. 20, 305, (1962) and G. Johansson, "On the crystal structure of a basic aluminium selenate", *Ark. Kemi.*, Vol. 20, 321, (1962)) form fine precipitates with diameters in the range 20-100 nm (J.Y. Bottero et al., *J. Colloid Int. Sci.*, Vol. 117, 47, (1987)) and, at this stage, the solution becomes turbid. A solid gel is formed when the molar ratio  $[\text{OH}]/[\text{Al}]$  reaches 2.75-2.85 (at pH  $5.5 \pm 0.2$ ). By selecting the appropriate activator, the gel time can be controlled in the range 12-96 hours at fluid temperatures in the range 45-140°C.

#### Evaluation of Chemical Compatibility

Inorganic particles composed of a surface-modified colloidal silica were added to the above system. The particles are positively charged in the pre-gel solution due to an alumina surface coating. Suitable alumina-coated colloidal silica suspensions are commercially available from Grace Davison, Columbia, Maryland, USA (a division of W.R. Grace & Co.); the relevant product range is "Ludox CL". This product is also available from Sigma-Aldrich Company Ltd., Gillingham, Dorset, UK. Some representative electron micrographs of two Ludox CL products have been obtained. Ludox CL12 has a mean particle diameter of 12 nm; 95% of the particle diameters are within 15-20% of the mean diameter, i.e. 95% of the particles have diameters within the range 10-14 nm. Thus, Ludox CL12 has a near-monodisperse particle size distribution. Ludox WPH-CL has an intentionally bimodal distribution of particle diameters, the smaller particles having a diameter 10-12 nm and the larger ones 35-40 nm.

Alternatively, an alumina-coated colloidal silica

suspension can be formed by the following process: (1) a basic aluminium chloride or aluminium chlorohydrate salt (e.g. as used in the gelling system described above) is added to an acidic colloidal silica sol, (2) sodium hydroxide is added to raise the pH to 4.5 and (3) the system is heated to 80-100°C to coat the colloidal silica particles with alumina. Similar processes can be used to coat colloidal silica with Zr or Ti. The particle diameter of the surface-modified colloidal silica particles is determined by that of the original colloidal silica sol. Thus, the mean particle diameter can be varied in the range 10-200nm (0.01-0.2µm).

Fig. 1 shows measurements of the zeta potential of colloidal alumina, Ludox CL12 and colloidal silica particles as a function of pH. The point of zero charge of colloidal silica occurs around pH 2; at this pH, uncharged silica particles can collide and coagulate (R.K. Iler, "The chemistry of silica", Wiley-Interscience publication (1979)). At pH > 7, the surface of the colloidal silica particles develops a negative charge which is sufficient to induce a mutual repulsion between the particles, and the suspension becomes charge-stabilised. The data show that (i) the colloidal alumina particles and the alumina-coated Ludox CL12 particles carry a positive surface charge and (ii) their surface charge density is at a maximum in the pH range 2-6. Thus, Ludox CL12 particles maintain a stabilising positive charge throughout the pH range (4-5.5) of the delayed inorganic gelling system described above.

Thus the surface chemistry and surface charge of the alumina-coated colloidal silica particles is matched to that of the delayed inorganic gelling system when the latter is based on the gradual hydrolysis of aluminium chloride and/or aluminium chlorohydrate gelant(s). On the other hand, non-modified colloidal silica particles are not compatible with or stable within such a gelling system because (i) the active pH

range (4-5.5) reduces the stabilising negative charge on the particles (see Fig. 1) and (ii) the positively charged aluminium species further neutralises the stabilising negative charge on the particles resulting in a rapid flocculation process.

The stability of alumina-coated colloidal silica particles as a function of the ionic composition of the solution and the compatibility of the particles with a delayed aluminium gelling system is described in the following Examples 1-4.

In particular, as the particle-laden pre-gel solutions will contact and mix with formation brines during placement, it is important to evaluate the stability of the particles and the associated gelling system as a function of the ionic composition of the solution. Typically, the particle-laden pre-gel solution is prepared using a freshwater or seawater basefluid; then, during placement, the fluid contacts and mixes with more saline formation waters residing in the pore space of the invaded reservoir rocks. The major dissolved inorganic constituents in sandstone formation brines are usually sodium (typically, in the concentration range 0.1-3.5 mol/L), calcium (up to  $\approx 0.2$  mol/L), magnesium (up to  $\approx 0.08$  mol/L), chloride (0.1-4.0 mol/L), bicarbonate (up to  $\approx 0.03$  mol/L) and sulphate (up to 0.03 mol/L) (H. Blatt et al., "Origin of Sedimentary Rocks", Prentice-Hall Inc., Englewood Cliffs, New Jersey, USA, (1980)). As the alumina-coated silica particles and the complex aluminium species in the associated gelling system carry a positive charge, it is particularly important to evaluate their tolerance to the presence of divalent anions which might be expected to induce flocculation/precipitation in the system.

Examples 1-3 are evaluations of the stability of the alumina-coated silica particles and the associated delayed gelling system as a function of respectively (i) ionic

strength (i.e. chloride concentration, added as potassium chloride), (ii) sulphate concentration (added as sodium sulphate, in the presence of a low or high chloride concentration) and (iii) carbonate concentration (added as sodium carbonate). Example 4 is an evaluation of the compatibility of alumina-coated silica particles with the delayed gelation process.

Example 1: Stability of alumina-coated colloidal silica particles and delayed gelling system as a function of the ionic strength of the "basefluid"

Fig. 2 is a plot showing the effect of increasing the concentration of potassium chloride (KCl) in the basefluid on the turbidity of: (1) 0.1 vol% colloidal silica (Ludox SM, mean particle diameter 7 nm, negatively charged at pH 7), (2) 0.1 vol% alumina-coated colloidal silica (Ludox CL12, mean particle diameter 12 nm, positively charged at pH 5) and (3) the delayed gelling system ("DGS"; pre-gel solution containing 4 wt%  $\text{Al}_2\text{OHCl}_5 \cdot 2.5\text{H}_2\text{O}$ , pH 4.5).

When  $[\text{KCl}] \leq 0.8 \text{ mol/L}$ , both the negatively charged "SM" and the positively charged "CL" particles were stabilised resulting in a similar low level of turbidity. However, when  $[\text{KCl}] \geq 0.8 \text{ mol/L}$ , "SM" particles were destabilised resulting in a highly turbid suspension. In contrast, "CL" particles were stable in the presence of at least 20 wt% (2.7 mol/L) KCl. The pre-gel DGS solution had a lower turbidity than 0.1 vol% CL and was also stable in 20 wt% KCl.

Example 2: Stability of alumina-coated colloidal silica particles and delayed gelling system in the presence of sulphate anions

Fig. 3 is a plot showing the effect of sulphate concentration on the stability of Ludox CL12 particles and the delayed gelling system ("DGS"; pre-gel solution containing

4wt%  $\text{Al}_2\text{OHCl}_5 \cdot 2.5\text{H}_2\text{O}$ , pH 4.5) both in the presence of a low (0.27 mol/L) and a high (2.7 mol/L) concentration of potassium chloride. In 0.27 mol/L KCl, the Ludox CL12 particle suspension and the pre-gel "DGS" solution became highly turbid when the molar ratio  $[\text{SO}_4^{2-}]/[\text{Cl}^-]$  reached 0.019 and 0.22, respectively. In 2.7 mol/L KCl, both Ludox CL12 and DGS were stable in the presence of up to 0.1 mol/L  $\text{SO}_4^{2-}$ , corresponding to the molar ratio  $[\text{SO}_4^{2-}]/[\text{Cl}^-] = 0.037$ . These data suggest that the particle/fluid system is compatible with typical formation brines for which the distribution of molar ratios  $[\text{SO}_4^{2-}]/[\text{Cl}^-]$  is  $< 0.013$  (H. Blatt *ibid.*). The data also suggest that the addition of a chloride salt may be required to stabilise the particles and DGS in seawater (molar ratio  $[\text{SO}_4^{2-}]/[\text{Cl}^-] = 0.052$ , H. Blatt *ibid.*).

*Example 3: Stability of alumina-coated colloidal silica particles and delayed gelling system in the presence of carbonate anions*

Fig. 4 is a plot showing the effect of carbonate concentration on the stability of Ludox CL12 particles alone, "DGS" alone (pre-gel solution containing 4wt%  $\text{Al}_2\text{OHCl}_5 \cdot 2.5\text{H}_2\text{O}$ , pH 4.5) and the combined CL/DGS system in the presence of a high (2.7 mol/L) concentration of potassium chloride. In the absence of DGS, Ludox CL12 particles flocculated in the presence of only 0.0015 mol/L carbonate which raised the pH to  $\approx 7$  (at this pH,  $\text{CO}_3^{2-}$  converts to  $\text{HCO}_3^-$ ). However, in the presence of DGS, the particles tolerated the presence of 0.02 mol/L carbonate. The DGS acted a buffer maintaining acidic conditions in which  $\text{HCO}_3^-$  is converted to  $\text{H}_2\text{CO}_3$ . The buffering capacity of the DGS system will increase with the gelant ( $\text{Al}_2\text{OHCl}_5 \cdot 2.5\text{H}_2\text{O}$ ) concentration in the formulation.

*Example 4: Compatibility of alumina-coated silica particles*

with delayed gelation process

Fig. 5 shows the effect of partially replacing the gelant,  $\text{Al}_2\text{OHCl}_5 \cdot 2.5\text{H}_2\text{O}$  ("G"), with Ludox CL12 particles ("CL") in terms of the observed delayed gel time and the gel strength/stability. The following series of gel strength codes was used to give a semi-quantitative estimation of gel strength and stability as a function of time:

Code 5: strong solid gel - space-filling solid white gel which does not deform/break when inclined or inverted.

Code 4: broken solid gel - gel fractures into a few solid white gel pieces when inclined or inverted and develops free water.

Code 3: weak flowing gel - pieces of gel are intimately mixed with free water to give a weak gel which flows when inclined.

Code 2: very weak gel - weak flowing gel which degrades to a slightly viscous milky suspension of gel aggregates.

Code 1: no gel - pre-gel solution (clear, water-like solution) or fully degraded gel (turbid suspension of precipitate).

In this comparison, the activator is urea ("U" present at 3 wt%), the basefluid is 2 wt% KCl and the temperature of the formulations was maintained at 75°C. When [G] = 1 wt% and [U] = 3 wt%, the addition of 1 or 2 wt% Ludox CL12 resulted in a slight increase in the gel time from 8 to 10 hours but the main effect was to increase the gel strength and stability of the gel. The gel composed of 1 wt% G + 2 wt% CL was visibly stronger and more stable than the gel formed from 3 wt% G.

Fig. 6 shows the effect of adding 1 or 2 wt% Ludox CL12 particles to a different DGS formulation containing 3 wt% gelant and the higher temperature activator, 1,3-dimethyl urea ("DMU" present at 1 wt%). In this comparison, the basefluid is 2 wt% KCl and the temperature of the formulations was maintained at 90°C. Again, the presence of the Ludox CL12 particles resulted in a more highly delayed gelation but the main effect was to strengthen the gel and to improve its

stability.

### Placement Selectivity

A uniaxial coreflood rig was used to evaluate the efficiency of using the alumina-coated colloidal silica particles to improve placement selectivity. The rig accommodates a cylindrical rock core 8cm in length and 5.05 cm in diameter. A constant pressure gradient was applied to pump the test fluid through the core to a weighed core effluent receiver vessel. High frequency measurements of the effluent flow rate were used to monitor the permeability of the core as a function of time. A differential pressure gradient of 60 psi/8 cm (229 psi/foot or 413.7 kPa/8 cm) was used in all the coreflood experiments; this is equivalent to the near-wellbore pressure gradient given by the injection of a fluid with Newtonian viscosity,  $\eta = 1 \text{ mPa.s}$ , into a 5 feet (1.52 m) thick horizontal layer of permeability 500 mD and porosity 15%. Each core was vacuum saturated with brine (2 wt% KCl) overnight before loading it into the rig. The core was then pre-flushed with > 100 pore volumes of 2 wt% KCl brine in order to determine the steady-state brine permeability of the core before introducing the test fluid.

Fig. 7 compares changes in the permeability (mD) of several different sandstone cores and one oolitic limestone core as a function of the uniaxial depth of flow (feet) when the test fluid was 0.1 vol% Ludox CL12 suspended in 2 wt% KCl brine. The brine permeability of the sandstones varied from 5 mD to 800 mD. Uniaxial (or linear) depth of flow (feet) = (no. pore volumes injected)  $\times$  8 cm/30.48 cm/ft. Referring to Fig. 7, the uniaxial depth of flow 400 feet corresponds to 1524 pore volumes (PV) injected. For example, at the uniaxial depth of flow 400 feet, the total volume of test fluid pumped through the 800mD sandstone (porosity=0.22) was (1524 PV)  $\times$  35.25 cm<sup>3</sup>/PV = 53721 cm<sup>3</sup>.

The data show that a very high number of pore volumes of the 0.1 vol% CL suspension can be injected into the 800 mD sandstone without any significant reduction in the permeability. In contrast, the same suspension caused a gradual blocking of the sandstones with initial permeability  $k < 140\text{mD}$ . It is also evident that the number of pore volumes of the suspension required to significantly reduce the permeability of these sandstones decreased with the initial brine permeability of the core. For example, the 140 mD sandstone became blocked after 230 pore volumes and the 5 mD sandstone became blocked after only 3 pore volumes. The data indicate that the suspension could be selectively placed in the higher permeability ( $k = 800\text{ mD}$ ) sandstone as the particles would limit flow into adjacent lower permeability ( $k < 140\text{mD}$ ) sandstone layers/zones.

We also note from Fig. 7 that the same suspension caused a rapid reduction in the permeability of the high permeability limestone core. This effect is caused by a rapid destabilisation (flocculation) of the Ludox CL12 particles due to their interaction with dissolved bicarbonate/carbonate ions in the pore fluid of the limestone core. This is consistent with the observation that, in the absence of gelant, the particles flocculate in the presence of 0.0015 mol/L carbonate (see Example 3, Fig. 4). However, when the same particles are suspended in the delayed gelling system, they become protected and are stable in the presence of 0.02 mol/L bicarbonate/carbonate. Even in the absence of gelant, when the pH of the suspension is adjusted to 3, the particles are stable in the presence of at least 0.15 mol/L bicarbonate/carbonate (the latter being rapidly converted to the form carbonic acid,  $\text{H}_2\text{CO}_3$ ).

Fig. 8 compares the pore throat diameter distributions (as determined by mercury porosimetry) of the 5 mD and 800 mD sandstones used in the coreflood experiments. The pore throat



diameter distribution of the lower permeability sandstone indicates a peak at 4.69  $\mu\text{m}$ , with the median (cumulative vol% = 50) at 2.64  $\mu\text{m}$ , and 87 vol% of the accessed pore volume containing pore throats with a diameter in the range 0.01-10  $\mu\text{m}$  (i.e. 10-10000 nm, compared to the nominal Ludox CL12 particle diameter 12 nm). In contrast, the data for the higher permeability sandstone indicate a peak at 28.1  $\mu\text{m}$ , with the median at 26.6  $\mu\text{m}$  and 83.3 vol% of the accessed pore volume containing pore throats with a diameter in the range 10-100  $\mu\text{m}$  (10000-100000 nm).

The data shown in Fig. 7 suggest that the particles reduce the permeability of the lower permeability ( $k < 140 \text{ mD}$ ) sandstones by a process which involves the gradual retention of particles and multi-particle aggregates. As the flood progresses, we believe that an increasing volume of particles is retained and that the presence of the retained particles and multi-particle aggregates results in an increased resistance to flow through pore throats. This hypothesis is consistent with the observed trend that the number of pore volumes of the suspension (or the total volume of particles) required to block the permeability of the lower permeability sandstones decreases with a decrease in the initial brine permeability (or a decrease in the diameter of the predominant pore throats).

It follows from this that, for a given initial brine permeability, the number of pore volumes of the suspension required for blocking should decrease with an increase in the concentration of particles in the suspension. Indeed, as shown in Fig. 9, this behaviour is observed for suspensions of Ludox CL12, again in 2 wt% KCl brine. In Fig. 9, we include the results of a coreflood where the porous media is a high permeability (4300 mD) pack of sized sand grains; this sandpack models a very high permeability sandstone layer the permeability of which is not impaired by the injection of

multiple pore volumes of a suspension containing 1 vol% Ludox CL12 particles. The data show that the number of pore volumes of the suspension (or the time) required to reduce the permeability of the 600-750 mD, 100-120 mD or 5mD sandstones decreases with an increasing concentration of particles in the suspension.

The data shown in Figs. 7-9 indicate that the particle suspension approach can be used to improve placement selectivity for the injection of a treatment fluid into a multi-layered reservoir where the objective is to increase the proportion of the fluid which invades the higher permeability layers/zones. The efficiency with which the suspension can improve the placement selectivity of such a treatment depends on the concentration and size of the particles in suspension and the permeability of the target and non-target zones. Both the permeability contrast,  $k_{\text{(target)}}/k_{\text{(non-target)}}$ , and the absolute permeability of the target zone are important inputs in the treatment design.

The particles may be used to divert the fluid "in-wellbore", i.e. due to a contrast in the horizontal permeability of the layers.

However, they may also form "crossflow barriers", as illustrated in Fig. 10. This shows schematically a well bore 1 penetrating a high permeability layer 2 sandwiched between lower permeability layers 3. During placement, the particles are carried by the fluid flow (indicated by the arrows) into the high permeability layer and accumulate to form crossflow barriers 4 in the lower permeability layers at the layer interfaces. These barriers reduce the flow of treatment fluid into the low permeability layers. In this case, the significant permeability contrast is  $k_{\text{h(target)}}/k_{\text{v(non-target)}}$ , where the subscripts h and v are respectively the horizontal and vertical directions.

Enhancement of Gel Strength and Stability

Boehmite needles of various aspect ratios were synthesised according to the procedure of P.A. Buining, Y.S.J. Veldhuizen, C. Pathmamanoharan and H.N.W. Lekkerkerker,

5 Colloids and Surfaces, **34**, 81 (1991). Aluminium-iso-propoxide (AIP, 98%, Janssen chemica) and aluminium-sec-butoxide (ASB, Fluka chemica) were dissolved in water which had been acidified with hydrochloric acid (37 %, Merck). The quantities of the reagents used to prepare two boehmites, designated "BM1" and "BM2", are given in Table 1.

After one week of hydrolysis, the polymerised aluminium hydroxides were crystallised into boehmite under hydrothermal conditions (150°C, 4 atm.). Dialysing thoroughly against flowing demineralised water resulted in a permanent  
15 birefringent, viscous dispersion of boehmite needles. After dialysis, the solid content of the boehmite dispersions was typically around 10 g/L (equivalent to  $\approx 0.3$  vol%). After vacuum drying the BM1 dispersion, an elemental analysis of the residue revealed 43.3 wt% Al, 52.1 wt% O and 1.95 wt% H which  
20 compares well with the relative amounts of Al, O and H in pure boehmite ( $\text{AlOOH}$ : 45.0 wt% Al, 53.3 wt% O and 1.7 wt% H).

Transmission electron micrographs of the boehmite rods in preparations BM1 and BM2 are respectively shown in Figs. 11 and 12. The boehmite rods in BM1 have an average length 90 nm and width 10 nm. The longer boehmite rods in BM2 have an  
25 average length 180 nm and width 10 nm.

Table 1: Synthesis details and dimensions of boehmites BM1 and BM2

System	[HCl] mol/L	[ASB] mol/L	[AIP] mol/L	Mean length (nm)	Relative standard deviation length (%)	Mean width (nm)	Relative standard deviation width (%)
BM1	0.04	0.2	-	91	29	10.8	34
BM2	0.09	0.08	0.08	180	30	10	30

The boehmite suspensions were kinetically stable at room temperature and 1 atm. In water at neutral pH, the boehmite needles carry a positive charge and are charge stabilised, as long as the ionic strength is  $<0.01$  mol/L. As shown in the examples, the chemistry and charge on the surface of the boehmite rods is compatible with delayed inorganic gelling systems based on the controlled hydrolysis of an aqueous solution of a simple aluminium halide salt such as aluminium chloride or a basic aluminium halide salt such as an aluminium chlorohydrate,  $Al_2(OH)_mCl_n$ , where, typically,  $m$  is in the range 4 to 5,  $n$  is in the range 1 to 2 and  $(m + n) = 6$ .

Silica-coated boehmite rods are the preferred choice for enhancing the strength and stability of a delayed silicate gel. This is because, in general, the rods should be chemically compatible with (i) the pre-gel solution so that the particle suspension is stable during fluid placement and (ii) the final gel so that adverse effects on gel time are minimised. Boehmite needles can be coated with a thin layer of silica according to a method developed by Philipse *et al.* (see A.P. Philipse, A. Nechifor and C. Pathmamanoharan, *Langmuir*, 10, 4451 (1994)). A dialysed boehmite dispersion was titrated with an aqueous solution of sodium silicate. For rods with large ( $> 10$ ) aspect ratios, the concentration of the boehmite dispersion should not be  $> 1$  g/L, whereas for aspect

ratios < 10, the concentration should not be higher than 5 g/L.

Before starting the titration, a 3wt% sodium silicate solution ( $\text{Na}_2\text{Si}_3\text{O}_7$ , Fluka chemica) was mixed with purified cation exchange resin (Dowex 50 Wx4), changing  $\text{Na}^+$  into  $\text{H}^+$ , causing a pH drop from 12 to 11. The exchanged sodium silicate solution was added to 1 litre of the rod dispersion of pH 5.5 with a peristaltic pump under vigorous stirring and ultrasonication, preventing aggregation of the rods in the first stage of the coating procedure. Aggregation was induced by a decrease of the surface potential as the isoelectric point (IEP) of boehmite at  $\text{pH} \approx 9$  was approached upon titrating with the alkaline waterglass solution. In order to pass the IEP quickly, the sodium silicate solution was rapidly added with a rate of 10 mL/min during the first 8 minutes. After 8 minutes, the addition rate of waterglass was adjusted to 8.5 mL/min. After another 8 minutes, the addition rate was reduced to 4 mL/min. After 30 minutes, sonication was stopped. At a pH of 9.5–10, small portions of the cation exchange resin were added to keep the pH constant, as a further increase of the pH would ultimately lead to dissolution of the silica coating at  $\text{pH} > 11.5$ . After a total of 30 minutes from the beginning of the addition of the waterglass, the waterglass addition rate was adjusted to 1 mL/min. In total, 500 mL of 3 wt% sodium silicate solution was added to the dispersion, irrespective of the initial boehmite concentration.

The dispersion was then dialysed against streaming demineralised water for 9 days to remove the non-precipitated silicates. After dialysis, the pH had dropped from 10 to 5.5 and, due to the lower solubility of silica at pH 5.5, all excess silica precipitated in bulk. These large silica aggregates were removed by centrifugation at 2500 rpm. The resulting blue-white scattering dispersions showed streaming

birefringence and had solid contents of around 1 g/L.

Two different delayed-gelation systems were generated using respectively non-coated and coated boehmite rods. The results show that the presence of particles, and particularly elongate particles, in delayed-gelation solutions can enhance gel strength and stability with an efficiency which can be higher than that achievable by the addition of an equivalent weight of extra gelant.

#### 10 *System 1: Non-coated Rod-shaped Particles*

Non-coated BM1 and BM2 boehmite rods were suspended in delayed-gelation systems based on the controlled hydrolysis of aluminium species starting from an aqueous solution of aluminium chloride and/or aluminium chlorohydrate,  $\text{Al}_2(\text{OH})_m\text{Cl}_n$ , where m is in the range 4 to 5, n is in the range 1 to 2 and  $(m + n) = 6$ . For these systems, the efficiency with which the boehmite rods enhanced gel strength and stability was compared to that of an equivalent dosage of CL spherical alumina-coated colloidal silica particles (more specifically, Ludox CL12 particles).

Fig. 13 shows the effect of increasing the gelant concentration,  $[\text{Al}_2(\text{OH})_5\text{Cl} \cdot 2.5\text{H}_2\text{O}]$  on the gel times and the strengths and stabilities of gels containing 1, 2 or 4 wt% gelant. In all cases, the pre-gel solutions contained 2 wt% potassium chloride and urea activator was present at a concentration of 3 wt%. The gels were developed by ageing the pre-gel solutions at a constant temperature of 71°C. No boehmite rods were present in these comparative examples.

When the concentration of gelant was 1 wt%, a very weak gel (code 2) formed after 9 hours but one hour later the gel had degraded to a turbid suspension which had a similar viscosity to the pre-gel solution. In contrast, when the gelant concentration was 4 wt%, a strong solid gel (code 5) formed after 24 hours. Subsequently, during the period 24-74

hours, the gel expelled water but the strength of the gel phase was maintained.

The effects of adding the shorter boehmite rods (BM1), the longer boehmite rods (BM2) and the spherical alumina-coated colloidal silica particles (CL) on the strengths and stabilities of the solutions containing 1 and 2 wt% gelant are respectively shown in Figs. 14, 15 and 16. Again, all the test solutions contained 2 wt% potassium chloride and 3 wt% urea, and all were aged at a constant temperature of 71°C. The test results indicate that the efficiency with which the different particles enhance gel strength and stability decreases in the following order:

BM2 (longer rods)	>>	BM1 (shorter rods)	>	CL (spheres)
Higher efficiency				Lower Efficiency

In terms of gel strength codes versus time, the gel formed by the system with 2 wt% gelant and 1 wt% BM2 was at least as strong and stable as the gel formed by the system containing 4 wt% gelant and no added particles.

Furthermore, as shown by the data in Fig. 17, which is a graph of amount of free water against time, the gel formed by 2 wt% gelant and 1 wt% BM2 showed a considerably reduced rate of free water development compared to that measured for the gel formed from 4 wt% gelant with no added particles. These results indicate that the rate of free water development decreases in the following order:

CL (spheres)	>	BM1 (shorter rods)	>	BM2 (longer rods)
Higher rate				Lower rate

Again, this trend shows that the stabilising influence of the particles increases from spheres to rods and from shorter to longer rods.

Fig. 18 shows the effect of increasing the ageing temperature on the gelation performance of particle-free solutions containing 2 and 4 wt% gelant. As expected, at the higher temperature (89°C), both formulations showed a decreased gel time. Also, the gel containing 4 wt% gelant exhibited a reduced stability.

Figs. 19 and 20 show the effects of adding the rod-like boehmite particles and the spherical alumina-coated colloidal silica particles in systems containing 2 wt% gelant and aged at 89°C. The data indicate the following trends in terms of the efficiency with which the particles enhance gel strength/stability and reduce the rate of free water development:

#### GEL STRENGTH/STABILITY

BM2 (longer rods)	>>	BM1 (shorter rods)	≈	CL (spheres)
Higher efficiency				Lower Efficiency

#### RATE OF FREE WATER DEVELOPMENT

CL (spheres)	≈	BM1 (shorter rods)	>	BM2 (longer rods)
Higher rate				Lower rate

At this higher temperature (89°C) the efficiency of the shorter rods (BM1) and the spheres (CL) is similar, but again the longer rods (BM2) show the highest efficiency in terms of enhancing gel strength and stability.

Next, we further studied the effect of adding rod-like boehmite particles or spherical alumina-coated colloidal silica particles to systems containing various concentrations of gelant ( $\text{Al}_2(\text{OH})_5\text{Cl} \cdot 2.5\text{H}_2\text{O}$ ) and activator (urea). However, in addition to assessing the strength and stability of the gels using the gel strength coding system, we monitored the yield stress of the gels contained in a cylindrical vessel using a Brookfield R/S Rheometer fitted with a V40-20 vane



(diameter 0.020 m, height 0.040 m). The ratio (b) of the vane diameter to the vessel diameter was 0.4.

The vane has a height (H) to diameter (D) ratio of 2:1.

A stress constant is required to convert the torque (Nm)

5 measured by the rheometer to shear stress (Pa). This constant is calculated as follows:

$$\tau_{\text{prom}} = (10^{-4}/\pi D^3)/(H/D + 1/3).$$

10 Hence, with the V40-20 vane,  $\tau_{\text{prom}} = 1.706$ , such that shear stress =  $1.706 \times \text{torque}$ .

The constant K-Gamma then converts the rotational rate or position into shear rate/strain values. K-Gamma depends on the diameter ratio, b, according to the relationship:

15

$$K\text{-gamma} = 0.2094/(1-b^2).$$

Thus, when  $b = 0.4$ ,  $K\text{-gamma} = 0.2492$ .

20 The procedure used to measure the yield stress of the gels was as follows: (1) the gel sample was removed from the ageing oven and cooled to ambient temperature, (2) the vessel containing the gel sample was clamped in a fixed position; (3) the vane was lowered into the centre of the vessel where it was fully covered by the sample; and (4) the vane was rotated  
25 at a fixed speed (0.2 revolutions per minute) and the shear stress monitored as a function of time. Early time behaviour was characterized by an increase in shear stress with time. However, at a critical shear stress, the yield stress, the gel sample "failed" such that the gel within the boundaries of the  
30 vane became detached from the bulk of the sample. The yield stress is a quantitative diagnostic of gel strength.

Fig. 21 shows the effect of gelant concentration, varied in the range 1-6 wt%, on gel time, strength and stability as determined by monitoring gel strength code. Since the

activator/gelant (w/w) ratio was constant (0.66), all five solutions formed gels after the same ageing time, 18 hours. Gel strength code monitoring differentiated the gels with gelant concentrations in the range 1 to 3 wt%, but failed to  
 5 differentiate the gels with gelant concentrations in the range 3 to 6wt%. In contrast, as shown in Fig. 22, the vane yield stress measurement gave a quantitative estimate of gel strength throughout the gelant concentration range 1 to 6 wt%.

Three series of experiments were then performed. In each  
 10 series gel strength codes and yield stress data were gathered for a number of solutions aged at 73°C. In series 1 the total amount of gelant + particles in each solution was 2 wt%; in series 2 the total amount of gelant + particles in each solution was 3 wt%; and in series 3 the total amount of gelant  
 15 + particles in each solution was 4 wt%. Across all the solutions the amount of activator was 1.5× the amount of gelant + particles. The sample volume for each of the yield stress measurements was 100 mL.

Figs. 23 to 25 show the results of these experiments. In  
 20 each figure, for the same samples, the upper plot shows gel strength codes against ageing time and the lower plot shows vane yield stresses against ageing time. Representative data regarding the rate of development of free water (FW) is also given in each lower plot. In order to measure vane yield  
 25 stress against ageing time, replicate samples of the same solution were prepared and aged under the same conditions, at each time a different replicate being used to perform the respective vane yield stress measurement.

From Figs. 23 to 25 the following trends can be  
 30 identified:

- For series 1 with 2 wt% (gelant + particles), the strength of the freshly formed gel increases in the order: 1 wt% gelant + 1 wt% CL (spherical particles) < 2 wt% gelant ≈ 1 wt% gelant + 1 wt% BM1 (shorter rods) < 1 wt% gelant + 1 wt% BM2

(longer rods).

— For series 2 with 3 wt% (gelant + particles), the combination with 2 wt% gelant + 1 wt% CL forms a stronger and more stable gel than the combination 1 wt% gelant + 2 wt% CL.

5 The same trend is observed for the equivalent blends containing gelant and BM1 (shorter rods).

— Relative to the solutions without added particles, the addition of spherical or rod-like particles stabilizes the gel as evidenced by the vane yield stress measurements and rate of  
10 free water development. The efficiency with which the particles stabilize the gel increases in the order: CL (spherical particles) < BM1 (shorter rods) < BM2 (longer rods).

Finally, the gel-stabilizing effect of CL (spherical  
15 particles) was confirmed by adding CL particles to a system activated using the urea derivative, 1,3-dimethyl urea and aged at 90°C.. The gel strength codes data shown in Fig. 26 indicate that the addition of 1 wt% CL particles to a system containing 3 wt% gelant ( $\text{Al}_2(\text{OH})_5\text{Cl} \cdot 2.5\text{H}_2\text{O}$ ) and 1wt% 1,3-  
20 dimethyl urea increased the maximum gel strength from 3 to 5 and improved the stability of the gel from 5 to >22 days.

#### *System 2: Coated Rod-shaped Particles*

Silica-coated boehmite rods were suspended in silicate  
25 delayed-gelation solutions. Again the efficiency with which the rods enhance gel strength and stability was compared to that of an equivalent dosage of colloidal silica particles.

The silicate gelling solutions were formed by adding ammonium sulphate (the activator) to an aqueous solution of  
30 sodium silicate (the gelant). The stock sodium silicate solution (supplied by Sigma-Aldrich Company, Gillingham, Dorset, U.K.) contained 14 wt% NaOH, 27 wt%  $\text{SiO}_2$  and 59 wt% water. By dilution with deionised water, sodium silicate solutions containing 1, 2 and 4 wt%  $\text{SiO}_2$  were prepared.

Ammonium sulphate was then dissolved in the diluted sodium silicate solutions to give the gelation solutions detailed below in Table 2.

Table 2: Compositions of silicate delayed gelation solutions

SiO <sub>2</sub> (wt%)	Molar ratio SO <sub>4</sub> /SiO <sub>2</sub>
1	0.20
1	0.25
1	0.3
1	0.4
2	0.5
2	0.6
2	0.7
2	0.8
4	0.7
4	1
4	1.5

The solutions listed in Table 2 were then aged under ambient laboratory conditions (20°C) to form space-filling silicate gels. Fig. 27 shows the observed relationships between gel time and molar ratio SO<sub>4</sub>/SiO<sub>2</sub>. The relationships are consistent with those published in R.C. Merrill and R.W. Spencer, "Gelation of sodium silicate: Effect of sulphuric acid, hydrochloric acid, ammonium sulphate and sodium aluminate", Reynold C. Merril and Robert W. Spence, Philadelphia Quartz Company, Philadelphia, Pennsylvania, 1949.

The solution containing 1 wt% SiO<sub>2</sub> with ammonium sulphate added to give a molar ratio SO<sub>4</sub>/SiO<sub>2</sub> = 1 formed a gel after 30 minutes. (see Fig. 27). This control solution was used to evaluate the effects of added particles. Spherical silica particles were added in the form of the product Ludox HS-40 (available as a 40 wt% suspension from Sigma-Aldrich Company

Ltd., Gillingham, Dorset, UK; mean particle diameter = 40 nm, surface area ~220 m<sup>2</sup>/g, sodium stabilizing counterion). The rod-like particles were added in the form of silica-coated BM1 and BM2 boehmite rods. The silica-coated BM1 rods (which had an average length of about 100nm) were designated Si-Boeh-100 and the silica-coated BM2 rods (which had an average length of about 200nm) were designated Si-Boeh-200.

Yield stress data (shown in Fig. 28) were then gathered for solutions respectively containing: no particles, 1 wt% Ludox HS-40, 0.75 wt% Si-Boeh-100, and 0.75 wt% Si-Boeh-200.

The addition of spherical or rod-like particles accelerated the gelation process such that the observed gel times decreased in the order: no particles > spherical particles > shorter rods > longer rods. A comparison of the vane yield stresses after 17 hours (1020 min) ageing shows that the presence of the particles enhances gel strength and that the efficiency with which the particles enhance strength decreases in the order: longer rods > shorter rods ≈ spherical particles.

While the invention has been described in conjunction with the exemplary embodiments described above, many equivalent modifications and variations will be apparent to those skilled in the art when given this disclosure. Accordingly, the exemplary embodiments of the invention set forth above are considered to be illustrative and not limiting. Various changes to the described embodiments may be made without departing from the spirit and scope of the invention.

Claims

1. An aqueous delayed-gelation solution comprising a dissolved metal salt which, in use, hydrolyses to form a gel,  
5 wherein the solution contains suspended inorganic particles.
2. An aqueous delayed-gelation solution according to any one of the previous claims, wherein the dissolved metal salt is an  
10 aluminium salt.
3. An aqueous delayed-gelation solution according to claim 2, wherein the aluminium salt is an aluminium halide or a hydrated aluminium halide.
- 15 4. An aqueous delayed-gelation solution according to claim 1, wherein the inorganic particles are elongate.
5. An aqueous delayed-gelation solution according to claim  
20 4, wherein the elongate inorganic particles are boehmite needles.
6. An aqueous delayed-gelation solution according to claim 4 or 5, wherein the elongate inorganic particles have a mean  
25 aspect ratio of at least 8.
7. An aqueous delayed-gelation solution according to any one of claims 4 to 6, wherein the elongate inorganic particles have a mean aspect ratio of at least 16.
- 30 8. An aqueous delayed-gelation solution according to any one of claims 4 to 7, wherein the metal salt is a polyvalent metal salt.

9. An aqueous delayed-gelation solution according to claim 8, wherein the metal salt is an aluminium salt.

10. An aqueous delayed-gelation solution according to claim 9, wherein the aluminium salt is an aluminium halide or a hydrated aluminium halide.

11. An aqueous delayed-gelation solution according to any one of claims 4 to 7, wherein the metal salt is a sodium silicate.

12. An aqueous delayed-gelation solution according to any one of the previous claims, wherein the solution further comprises a hydrolisation activator.

13. An aqueous delayed-gelation solution according to claim 12, wherein the hydrolisation activator is a pH-increasing reactant.

14. An aqueous delayed-gelation solution according to claim 12 or 13, wherein the hydrolisation activator is urea or urea derivative.

15. Use of the delayed-gelation solution according to any one of the previous claims for treating a hydrocarbon well.

16. A method of selectively placing a delayed-gelation solution in a hydrocarbon well, the method comprising the steps of:

providing the aqueous delayed-gelation solution of any one of claims 1 to 14, and

injecting the solution into the hydrocarbon well, whereby the suspended inorganic particles reduce or block the flow of the delayed-gelation solution to relatively low permeability formation zones thereby selectively placing the solution in a

relatively high permeability formation zone.

21. A method of reducing the permeability of a formation zone of a hydrocarbon well, the method comprising the steps of:

5 providing the aqueous delayed-gelation solution of any one of claims 1 to 14,


placing the solution in the formation zone, and

allowing the dissolved metal salt to hydrolyse, thereby forming a gel which contains suspended inorganic particles and  
10 which reduces the permeability of the zone.



## SUMMARY

The invention concerns an aqueous delayed-gelation solution and a method of selectively placing a delayed-gelation solution in a hydrocarbon well. According to the invention, 5 the aqueous delayed-gelation solution a dissolved metal salt which, in use, hydrolyses to form a gel, wherein the solution contains suspended inorganic particles and the method comprises the steps of - providing the aqueous delayed- 10 gelation solution, and - injecting the solution into the hydrocarbon well, whereby the suspended inorganic particles reduce or block the flow of the delayed-gelation solution to relatively low permeability formation zones thereby selectively placing the solution in a relatively high 15 permeability formation zone. Applications of the invention relate to the treatment of hydrocarbon wells.

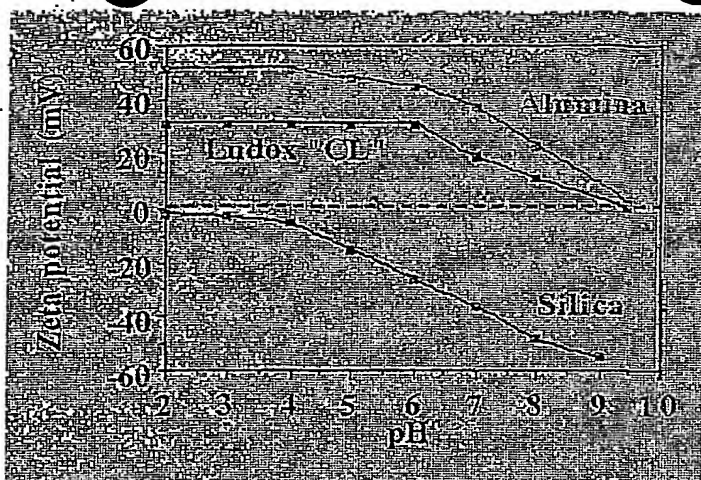

32  
24  
91

Fig. 3-1

Figure 3: Zeta potential (surface charge) of colloidal alumina, Ludox CL12 and colloidal silica particles as a function of pH

[n.b. colloidal alumina and Ludox CL12 particles are positively charged and show a similar dependence of their surface charge density on pH; by contrast, non-modified colloidal silica is negatively charged]

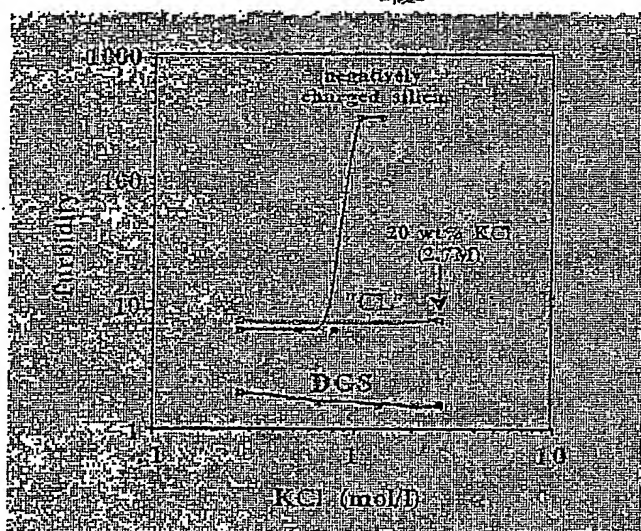


Fig. 3-2

Figure 4: Stability of negatively charged colloidal silica particles, positively charged alumina-coated colloidal silica particles ("CL") and the delayed gelling system ("DGS") as a function of the ionic strength ([KCl]) of the basefluid

Witnessed, read and understood by:

Inventor(s):

1. \_\_\_\_\_  
2. \_\_\_\_\_  
(Signature) (Date) (Location)  
(Date) (Location)

1. \_\_\_\_\_  
2. \_\_\_\_\_  
(Signature) (Date) (Location)  
(Signature) (Date) (Location)

3. \_\_\_\_\_  
4. \_\_\_\_\_  
(Signature)  
(Signature)

This information is CONFIDENTIAL and must not be copied in whole or any part, and should be filed accordingly by the addressee.

It must not be shown to or discussed with anyone outside the SCHLUMBERGER organisation.

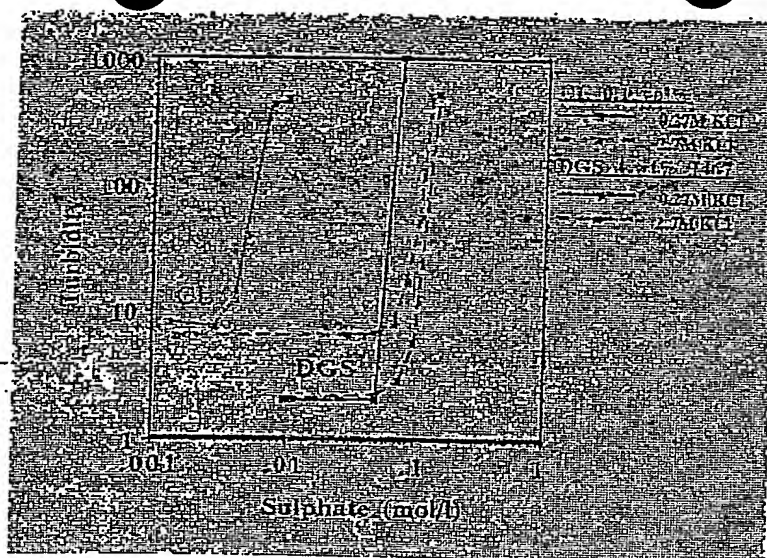


Fig. 43

Figure 5: Stability of alumina-coated colloidal silica particles ("CL") and delayed gelling system ("DGS") as a function of the sulphate and chloride concentration of the basefluid

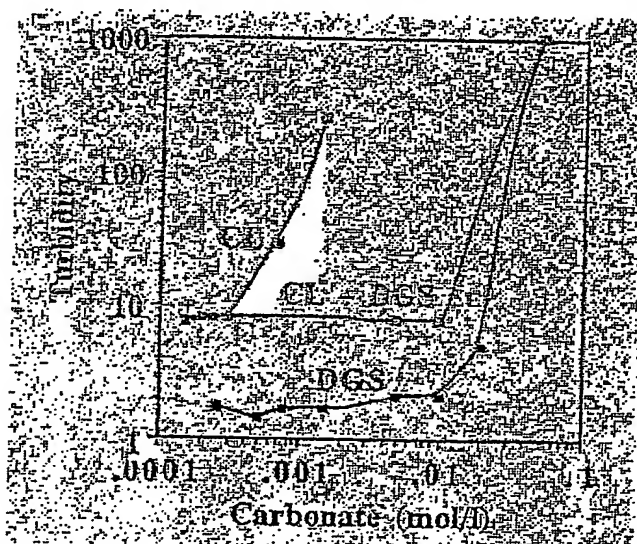


Fig. 44

Figure 6: Stability of alumina-coated colloidal silica particles ("CL"), delayed gelling system ("DGS") and combined CL/DGS system as a function of the carbonate concentration of the basefluid

Witnessed, read and understood by:

Inventor(s):

1. \_\_\_\_\_  
 (Signature) (Date) (Location)  
 2. \_\_\_\_\_  
 (Signature) (Date) (Location)

1. \_\_\_\_\_  
 (Signature) (Date) (Location)  
 2. \_\_\_\_\_  
 (Signature) (Date) (Location)  
 3. \_\_\_\_\_  
 (Signature)  
 4. \_\_\_\_\_  
 (Signature)

This information is CONFIDENTIAL and must not be copied in whole or any part, and should be filed accordingly by the addressee.  
 It must not be shown to or discussed with anyone outside the SCHLUMBERGER organisation.

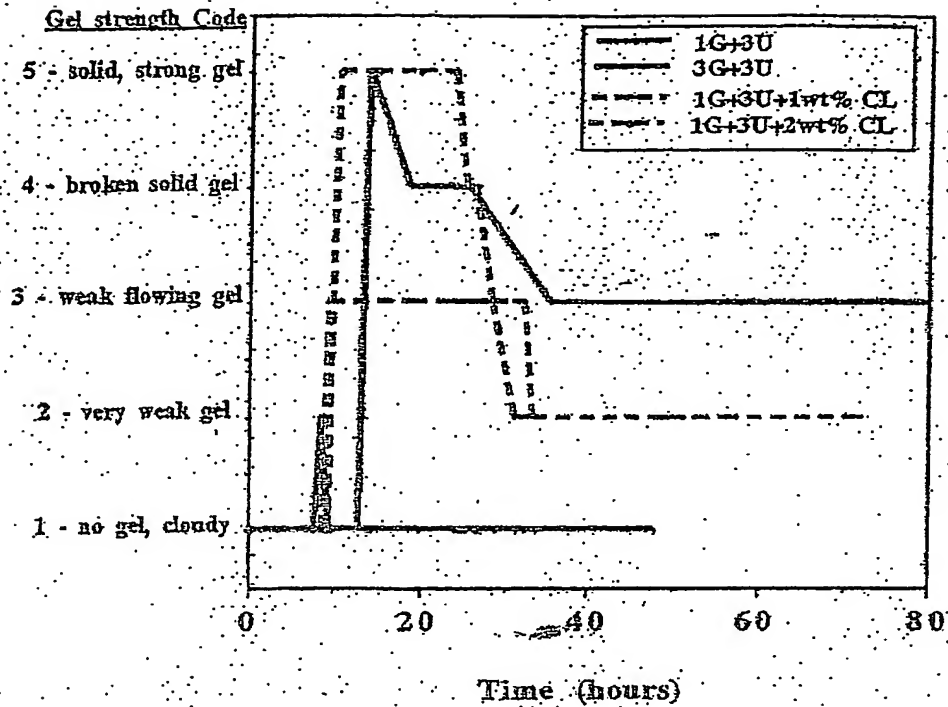


Figure 7. Effect of alumina-coated colloidal silica particles ("CL") on delayed gelation performance (T=75°C)

Fig. 85

Witnessed, read and understood by:

Inventor(s):

1. _____	1. _____	3. _____
2. _____	2. _____	4. _____
(Signature) (Date) (Location)	(Signature) (Date) (Location)	(Signature)

This information is CONFIDENTIAL and must not be copied in whole or any part, and should be filed accordingly by the addressee.

It must not be shown to or discussed with anyone outside the SCHLUMBERGER organisation.

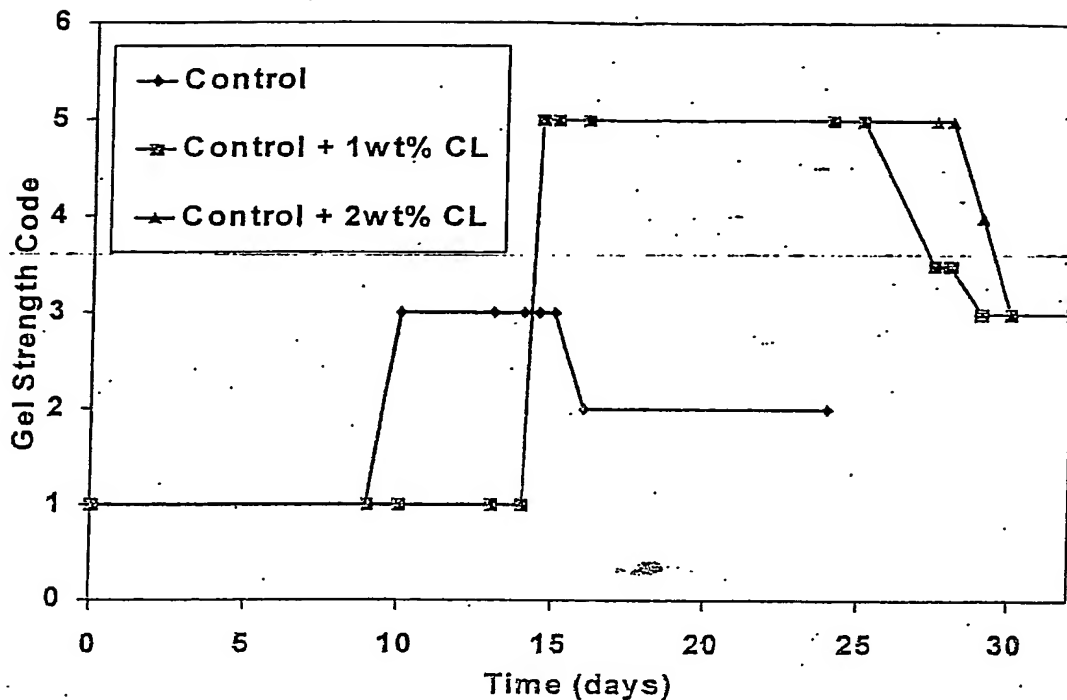


Figure 8. Effect of alumina-coated colloidal silica particles ("CL")  
on delayed gelation performance ( $T=90^{\circ}\text{C}$ )  
[y axis refers to gel strength codes 1-6 as defined in Fig. 7]

Fig. 7 6

Witnessed, read and understood by:


Inventor(s):

1. \_\_\_\_\_  
 (Signature) (Date) (Location)  
 2. \_\_\_\_\_  
 (Signature) (Date) (Location)

1. \_\_\_\_\_  
 (Signature) (Date) (Location)  
 2. \_\_\_\_\_  
 (Signature) (Date) (Location)

3. \_\_\_\_\_  
 (Signature)  
 4. \_\_\_\_\_  
 (Signature)

This information is CONFIDENTIAL and must not be copied in whole or any part, and should be filed accordingly by the addressee.  
 It must not be shown to or discussed with anyone outside the SCHLUMBERGER organisation.

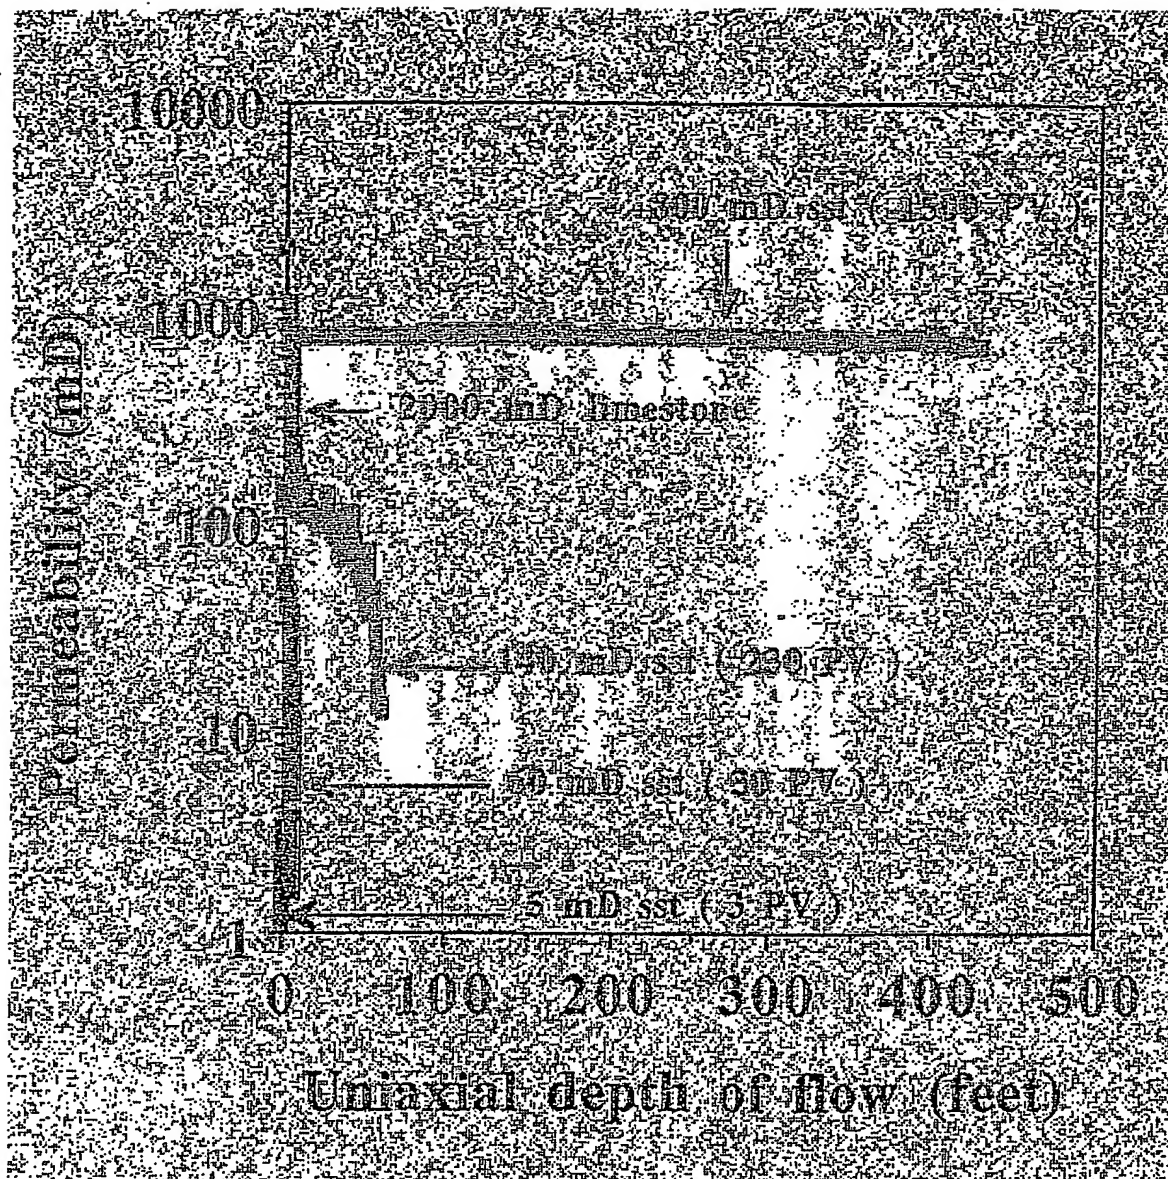

**Figure 9: Permeability versus uniaxial depth of flow.**  
**Test fluid 0.1vol% Ludox CL particles in 2wt% KCl**

Witnessed, read and understood by:

Inventor(s):

1. \_\_\_\_\_  
 (Signature) (Date) (Location)  
 (Date) (Location)

1. \_\_\_\_\_  
 (Signature) (Date) (Location)

3. \_\_\_\_\_  
 (Signature)

This information is CONFIDENTIAL and must not be copied in whole or any part, and should be filed accordingly by the addressee.

It must not be shown to or discussed with anyone outside the SCHLUMBERGER organisation.

7  
 7.8

6/24

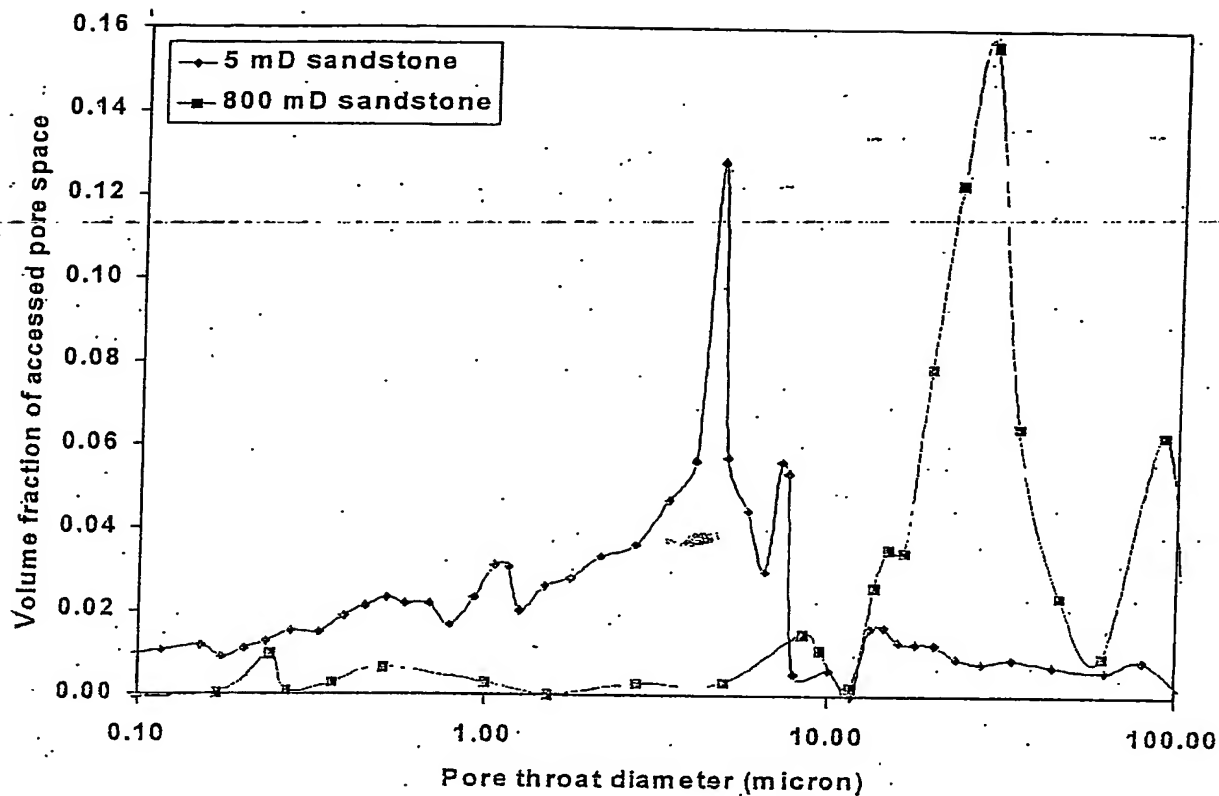


Figure 10: Pore throat size distributions  
~~(as determined by mercury porosimetry) for 5mD and 800mD sandstones~~

Fig. 98

Witnessed, read and understood by:

Inventor(s):

1. \_\_\_\_\_  
 \_\_\_\_\_  
 (Signature) (Date) (Location)  
 (Date) (Location)

1. \_\_\_\_\_  
 \_\_\_\_\_  
 (Signature) (Date) (Location)

3. \_\_\_\_\_  
 \_\_\_\_\_  
 (Signature)

This information is CONFIDENTIAL and must not be copied in whole or any part, and should be filed accordingly by the addressee.  
 It must not be shown to or discussed with anyone outside the SCHLUMBERGER organisation.

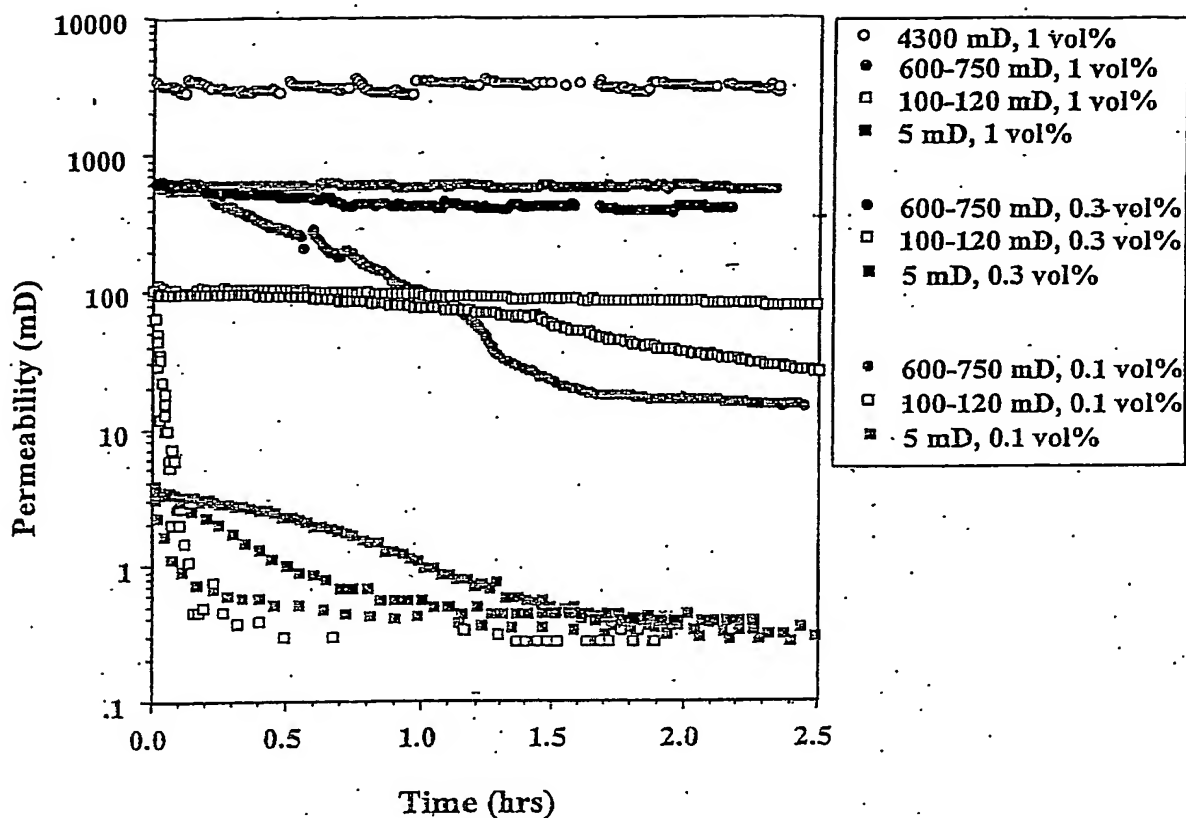


Figure 10: Permeability versus time:  
Test fluids 0.1, 0.3 and 1 vol% Ludox CL in 2wt% KCl

Fig. 10.9

Witnessed, read and understood by:

Inventor(s):

1. _____	1. _____	3. _____
2. _____	2. _____	4. _____
(Signature) (Date) (Location)	(Signature) (Date) (Location)	(Signature)

This information is CONFIDENTIAL and must not be copied in whole or any part, and should be filed accordingly by the addressee.

It must not be shown to or discussed with anyone outside the SCHLUMBERGER organisation.



particles in suspension and the permeability of the target and non-target zones. Both the permeability contrast,  $k_{\text{(target)}}/k_{\text{(non-target)}}$ , and the absolute permeability of the target zone are required inputs in the treatment design. As implied in Figure 1, the approach can be used to create crossflow barriers during placement; the design of such a treatment (with/without mechanical isolation in the wellbore) may require information pertaining to both the horizontal and vertical permeability of the layers.

### Figures

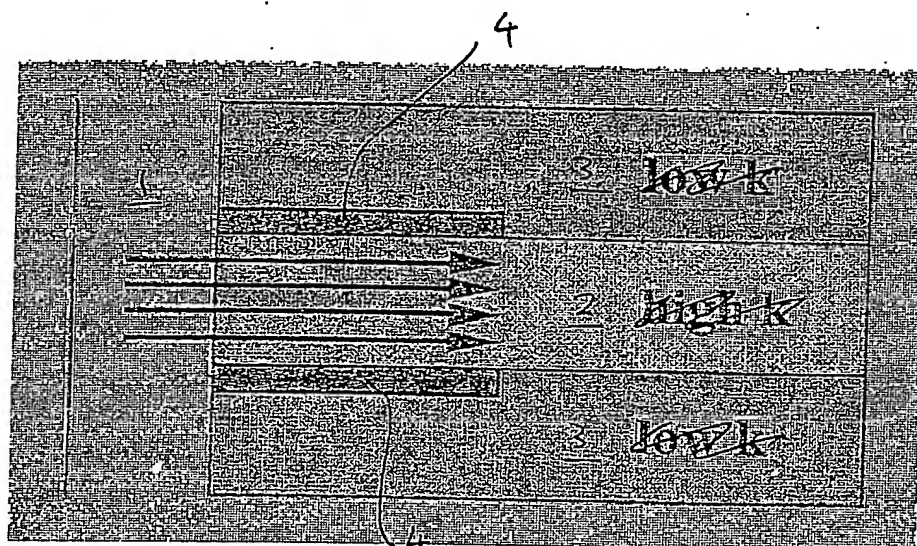


Figure 1:

Schematic of particles forming crossflow barriers (shown in red)  
as fluid invades higher k target layer

[n.b. in this case, the particles respond to the permeability contrast,  $k_{h(\text{target})} / k_{v(\text{non-target})}$ , where subscripts h and v are the horizontal and vertical directions, respectively]

Fig. N 10

Witnessed, read and understood by:

Inventor(s):

1. ....	1. ....	3. ....
2. ....	2. ....	4. ....
(Signature) (Date) (Location)	(Signature) (Date) (Location)	(Signature)

This information is CONFIDENTIAL and must not be copied in whole or any part, and should be filed accordingly by the addressee.  
 It must not be shown to or discussed with anyone outside the SCHLUMBERGER organisation.

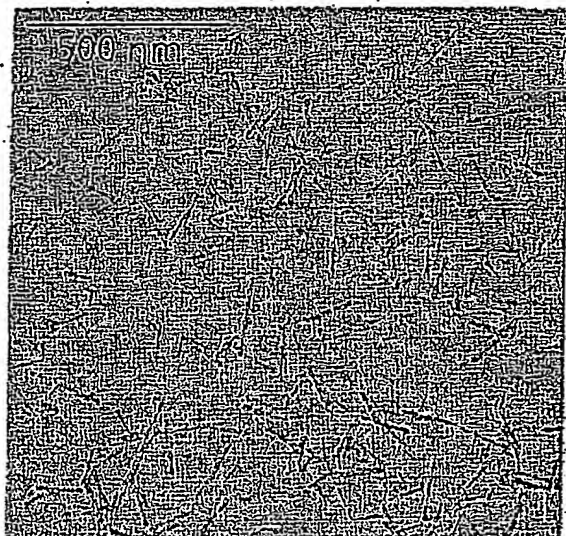
Figures

Figure 1. Transmission electron microscopy (TEM) micrograph of short boehmite rods after dialysis. Average dimensions are collected in table I. The system code is B1.

Fig. 12-1

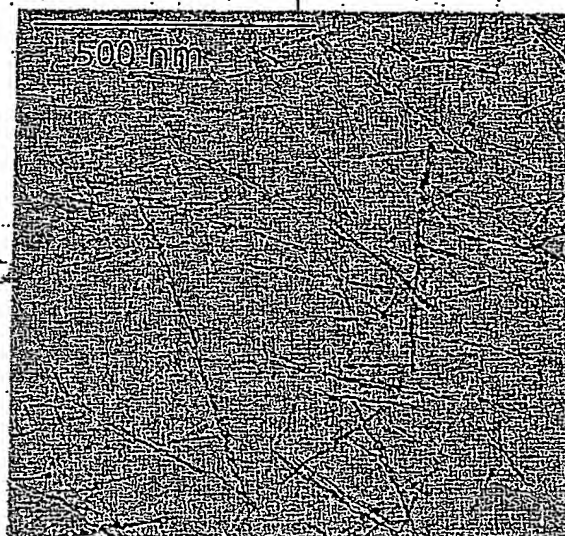


Figure 2. TEM micrograph of long boehmite rods after dialysis. Average dimensions are collected in table I. The system code is B2.

Fig. 12-2

Transmission electron microscopy (TEM) micrographs of (a) shorter boehmite rods (BM1; Figure 1) and (b) longer boehmite rods (BM2; Figure 2)

Witnessed, read and understood by:

Inventor(s):

1. \_\_\_\_\_  
 2. \_\_\_\_\_  
 (Signature) (Date) (Location)  
 (Date) (Location)

1. \_\_\_\_\_  
 2. \_\_\_\_\_  
 (Signature) (Date) (Location)

3. \_\_\_\_\_  
 4. \_\_\_\_\_  
 (Signature)

This information is CONFIDENTIAL and must not be copied in whole or any part, and should be filed accordingly by the addressee.

It must not be shown to or discussed with anyone outside the SCHLUMBERGER organisation.

10/24

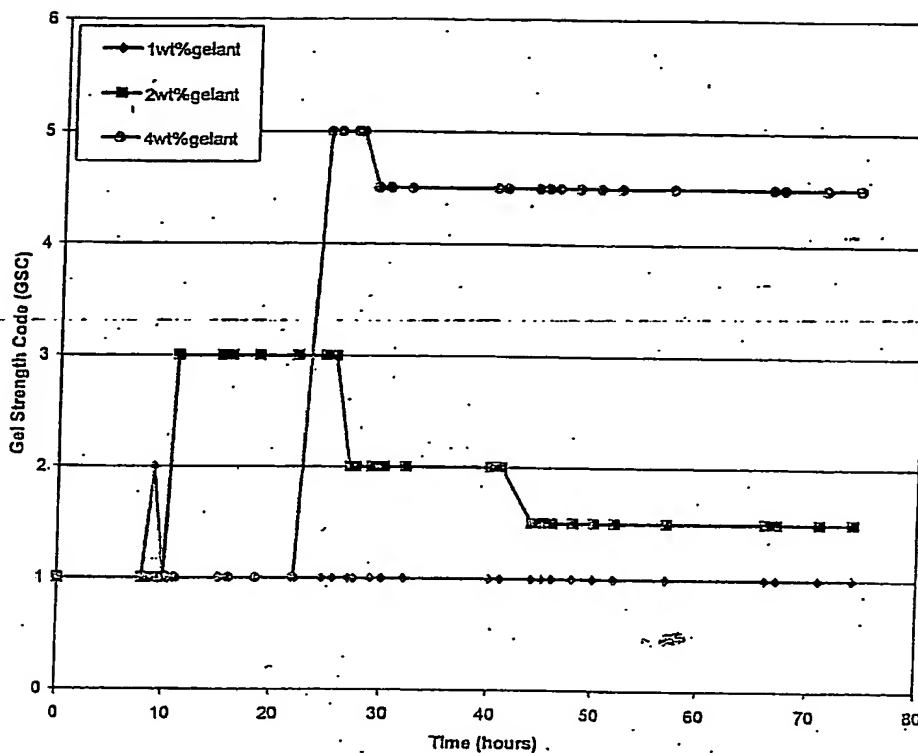


Figure 4: Delayed inorganic gelling systems aged at 71°C  
Effect of gelant concentration on gel strength and stability  
All test solutions contain 2wt% KCl and 3wt% urea

Fig. 143

Witnessed, read and understood by:

Inventor(s):

1. \_\_\_\_\_  
 (Signature) (Date) (Location)  
 2. \_\_\_\_\_  
 (Signature) (Date) (Location)

1. \_\_\_\_\_  
 (Signature) (Date) (Location)  
 2. \_\_\_\_\_  
 (Signature) (Date) (Location)

3. \_\_\_\_\_  
 (Signature)  
 4. \_\_\_\_\_  
 (Signature)

This information is CONFIDENTIAL and must not be copied in whole or any part, and should be filed accordingly by the addressee.  
 It must not be shown to or discussed with anyone outside the SCHLUMBERGER organisation.

11/24

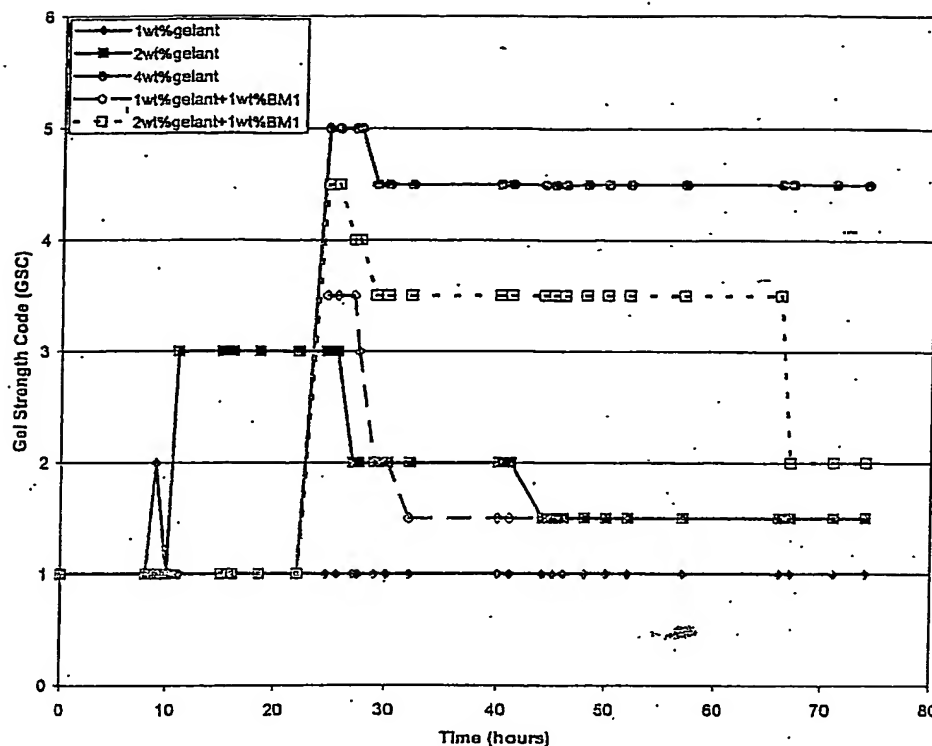


Figure 5: Delayed inorganic gelling systems aged at 71°C  
Effect of shorter boehmite rods (BM1) on gel strength and stability  
All test solutions contain 2wt% KCl and 3wt% urea

Fig. 13/4

Witnessed, read and understood by:

Inventor(s):


1. \_\_\_\_\_  
 2. \_\_\_\_\_  
 (Signature) (Date) (Location)  
 (Date) (Location)

1. \_\_\_\_\_  
 2. \_\_\_\_\_  
 (Signature) (Date) (Location)

3. \_\_\_\_\_  
 4. \_\_\_\_\_  
 (Signature)

This information is CONFIDENTIAL and must not be copied in whole or any part, and should be filed accordingly by the addressee.  
 It must not be shown to or discussed with anyone outside the SCHLUMBERGER organisation.

12/24

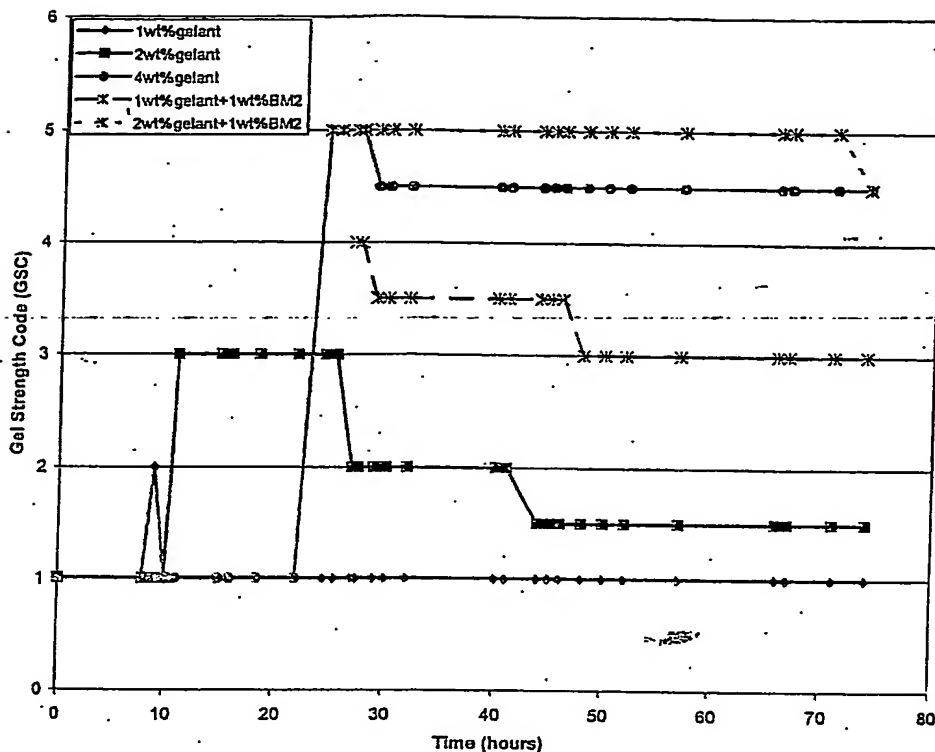

~~Figure 6. Delayed inorganic gelling systems aged at 71°C~~  
~~Effect of longer boehmite rods (BM2) on gel strength and stability~~  
~~All test solutions contain 2wt% KCl and 3wt% urea~~


Fig. 145

Witnessed, read and understood by:

Inventor(s):

1. ....	1. ....	3. ....
2. ....	2. ....	4. ....
(Signature)	(Signature)	(Signature)
(Date)	(Date)	(Date)
(Location)	(Location)	(Location)

This information is CONFIDENTIAL and must not be copied in whole or any part, and should be filed accordingly by the addressee.  
 It must not be shown to or discussed with anyone outside the SCHLUMBERGER organisation.

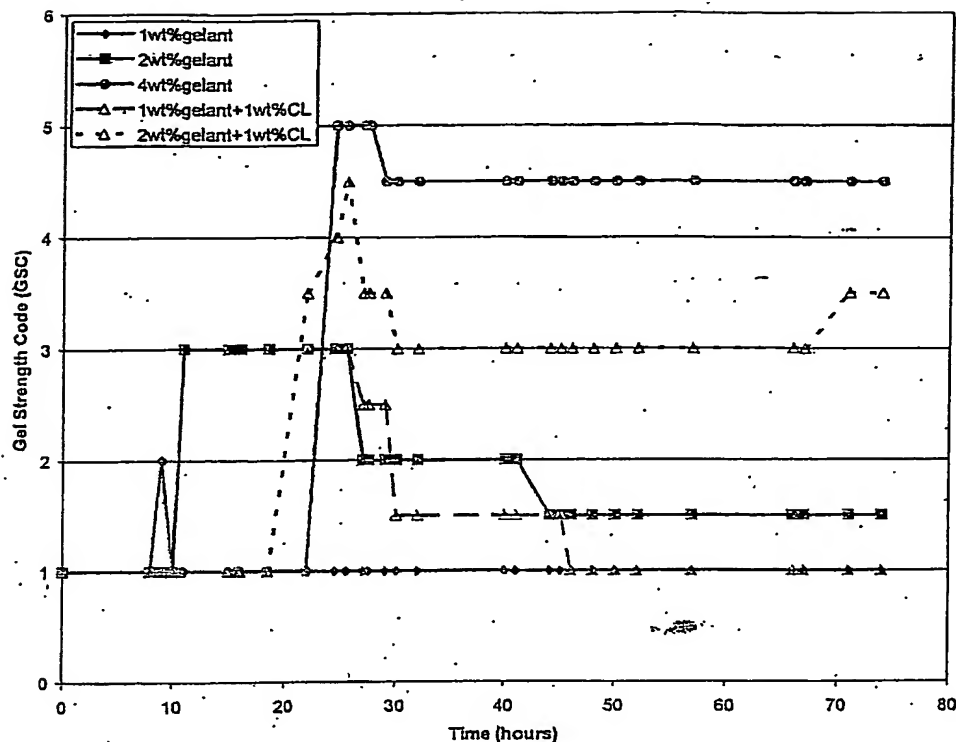

~~Figure 7. Delayed inorganic gelling systems aged at 71°C~~  
~~Effect of spherical alumina coated silica particles (CL) on gel strength and stability~~  
~~All test solutions contain 2wt% KCl and 3wt% urea~~

Fig. 176

Witnessed, read and understood by:

Inventor(s):

1. \_\_\_\_\_  
 (Signature) (Date) (Location)  
 2. \_\_\_\_\_  
 (Signature) (Date) (Location)

1. \_\_\_\_\_  
 (Signature) (Date) (Location)  
 2. \_\_\_\_\_  
 (Signature) (Date) (Location)

3. \_\_\_\_\_  
 (Signature)  
 4. \_\_\_\_\_  
 (Signature)

This information is CONFIDENTIAL and must not be copied in whole or any part, and should be filed accordingly by the addressee.  
 It must not be shown to or discussed with anyone outside the SCHLUMBERGER organisation.

14/24

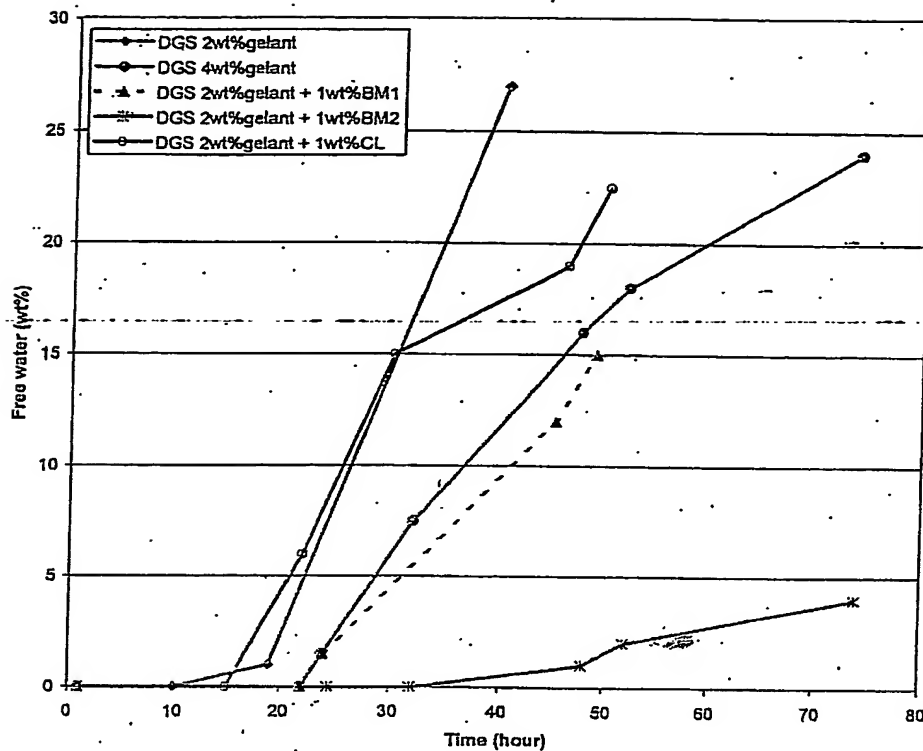


Figure 8: Delayed inorganic gelling systems aged at 71°C  
Effect of red-like or spherical particles on free water development  
All test solutions contain 2wt% KCl and 3wt% urea

Fig. 187

Witnessed, read and understood by:

Inventor(s):

1. \_\_\_\_\_  
 (Signature) (Date) (Location)  
 2. \_\_\_\_\_  
 (Signature) (Date) (Location)

1. \_\_\_\_\_  
 (Signature) (Date) (Location)  
 2. \_\_\_\_\_  
 (Signature) (Date) (Location)

3. \_\_\_\_\_  
 (Signature)  
 4. \_\_\_\_\_  
 (Signature)

This information is CONFIDENTIAL and must not be copied in whole or any part, and should be filed accordingly by the addressee.  
 It must not be shown to or discussed with anyone outside the SCHLUMBERGER organisation.

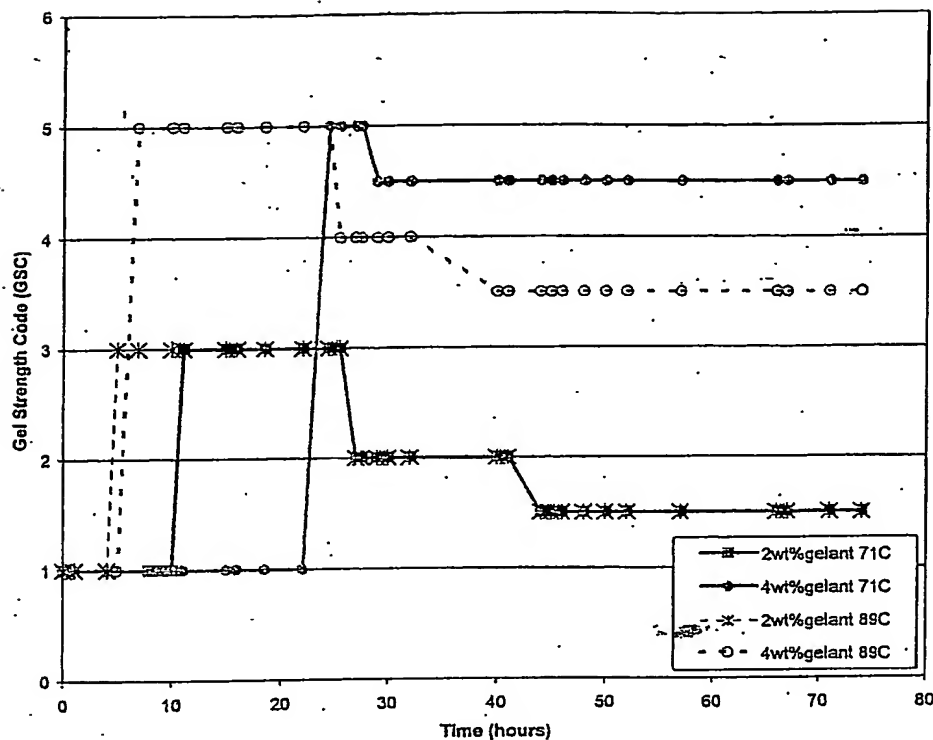


Figure 9: Delayed inorganic gelling systems  
Effect of temperature on gel time, gel strength and stability  
All test solutions contain 2wt% KCl and 3wt% urea

Fig. 198

Witnessed, read and understood by:

Inventor(s):

1. \_\_\_\_\_  
 (Signature) (Date) (Location)  
 2. \_\_\_\_\_  
 (Signature) (Date) (Location)

1. \_\_\_\_\_  
 (Signature) (Date) (Location)  
 2. \_\_\_\_\_  
 (Signature) (Date) (Location)

3. \_\_\_\_\_  
 (Signature)  
 4. \_\_\_\_\_  
 (Signature)

This information is CONFIDENTIAL and must not be copied in whole or any part, and should be filed accordingly by the addressee.

It must not be shown to or discussed with anyone outside the SCHLUMBERGER organisation.



16/24

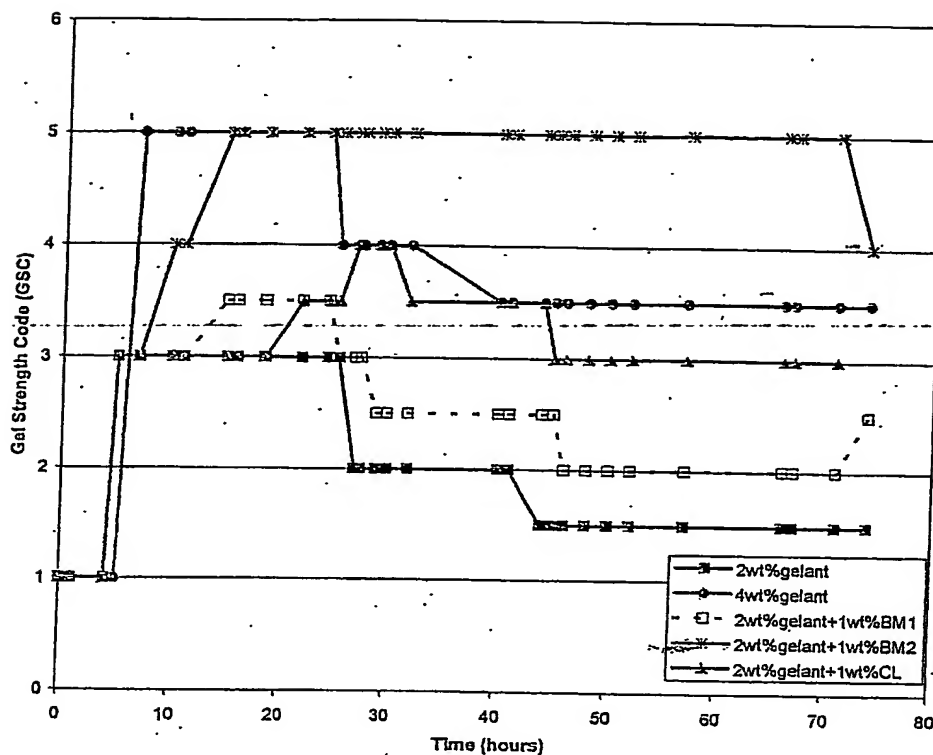


Figure 10: Delayed inorganic gelling systems aged at 89°C  
Effect of rod-like or spherical particles on gel time, strength and stability  
All test solutions contain 2wt% KCl and 3wt% urea

Fig. 2Q-19

Witnessed, read and understood by:

Inventor(s):

1. \_\_\_\_\_  
 (Signature) (Date) (Location)

2. \_\_\_\_\_  
 (Signature) (Date) (Location)

1. \_\_\_\_\_  
 (Signature) (Date) (Location)

2. \_\_\_\_\_  
 (Signature) (Date) (Location)


3. \_\_\_\_\_  
 (Signature)

4. \_\_\_\_\_  
 (Signature)

This information is CONFIDENTIAL and must not be copied in whole or any part, and should be filed accordingly by the addressee.

It must not be shown to or discussed with anyone outside the SCHLUMBERGER organisation.

17/24

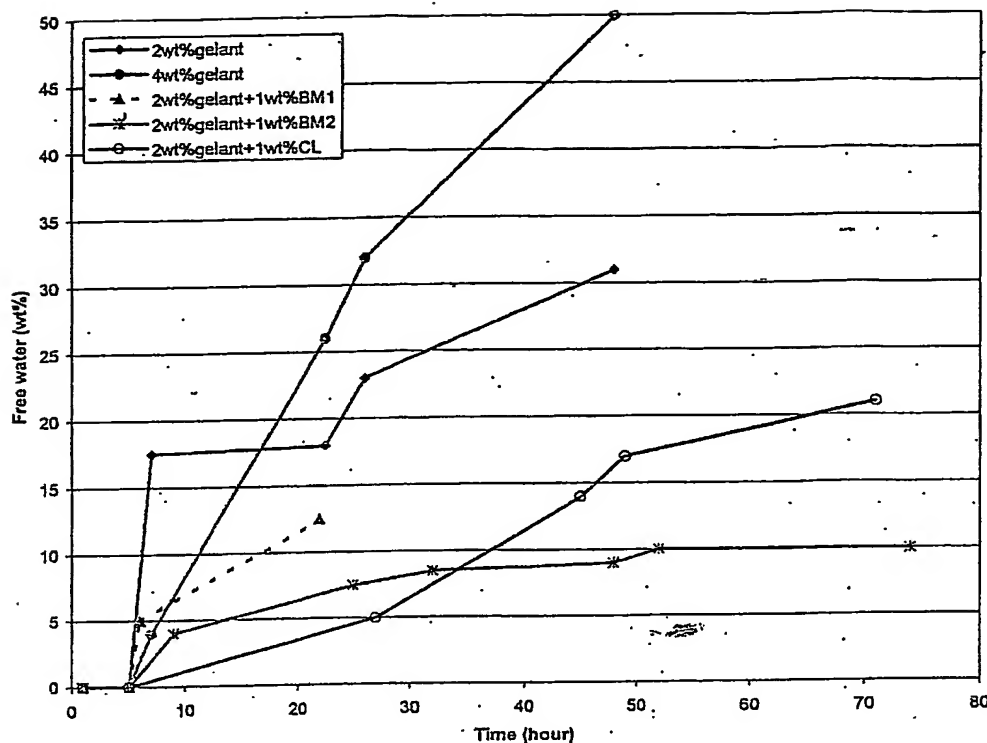

~~Figure 11: Delayed inorganic gelling systems aged at 89°C~~  
~~Effect of rod like or spherical particles on free water development~~  
~~All test solutions contain 2wt% KCl and 3wt% urea~~

Fig. 2/0

Witnessed, read and understood by:

Inventor(s):

1. \_\_\_\_\_  
 (Signature) (Date) (Location)  
 2. \_\_\_\_\_  
 (Signature) (Date) (Location)

1. \_\_\_\_\_  
 (Signature) (Date) (Location)  
 2. \_\_\_\_\_  
 (Signature) (Date) (Location)

3. \_\_\_\_\_  
 (Signature)  
 4. \_\_\_\_\_  
 (Signature)

This information is CONFIDENTIAL and must not be copied in whole or any part, and should be filed accordingly by the addressee.  
 It must not be shown to or discussed with anyone outside the SCHLUMBERGER organisation.

18/24

~~contrast, as shown in Figure C, the vane yield stress measurement gives a quantitative estimate of gel strength throughout the gelant concentration range 1-6wt%.~~

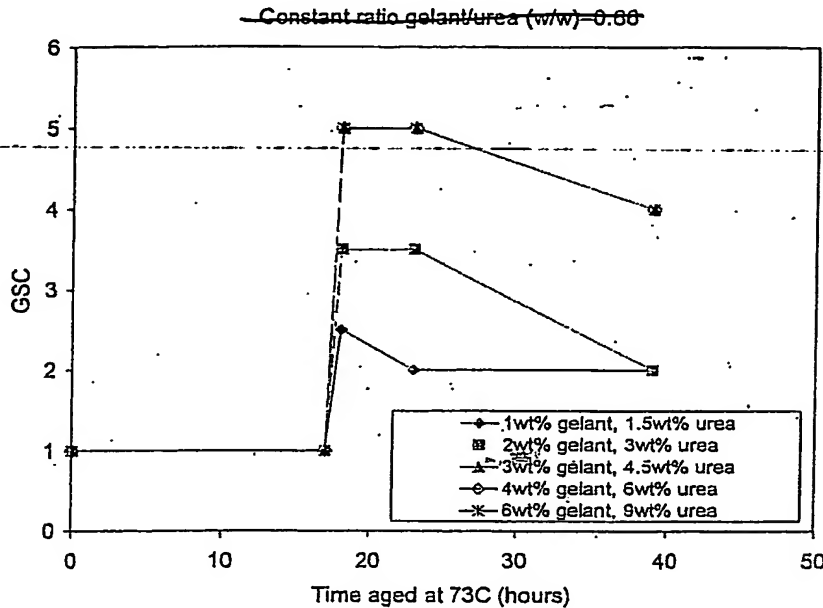


Fig. 221

~~Figure B. Gel strength code versus ageing time for formulations with increasing gelant concentration and constant ratio gelant/activator (w/w) = 0.66; ageing temperature 73°C~~

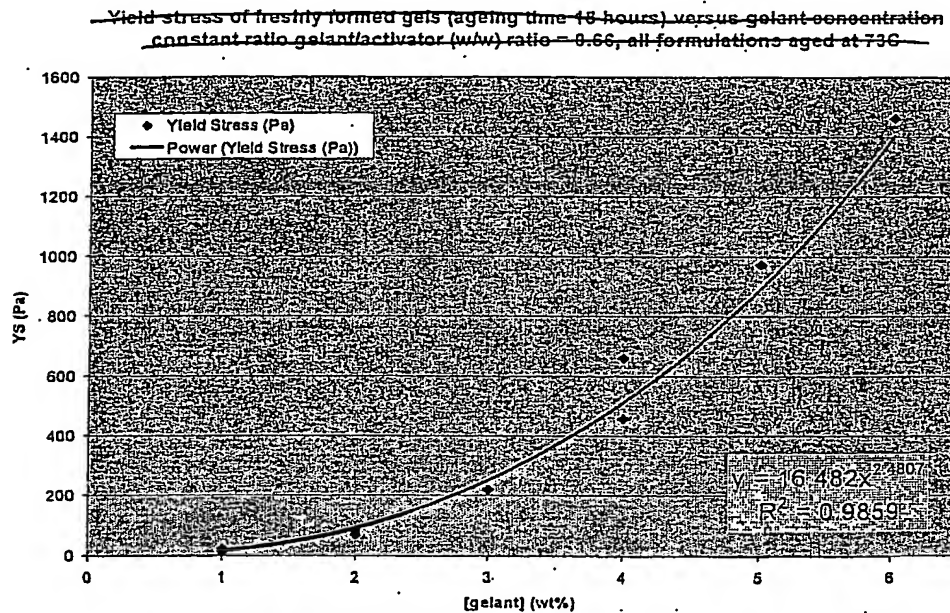


Fig. 222

~~Figure C. Relationship between vane yield stress and gelant concentration.~~  
~~constant ratio gelant/activator (w/w) = 0.66; all formulations aged at 73°C~~

19/24

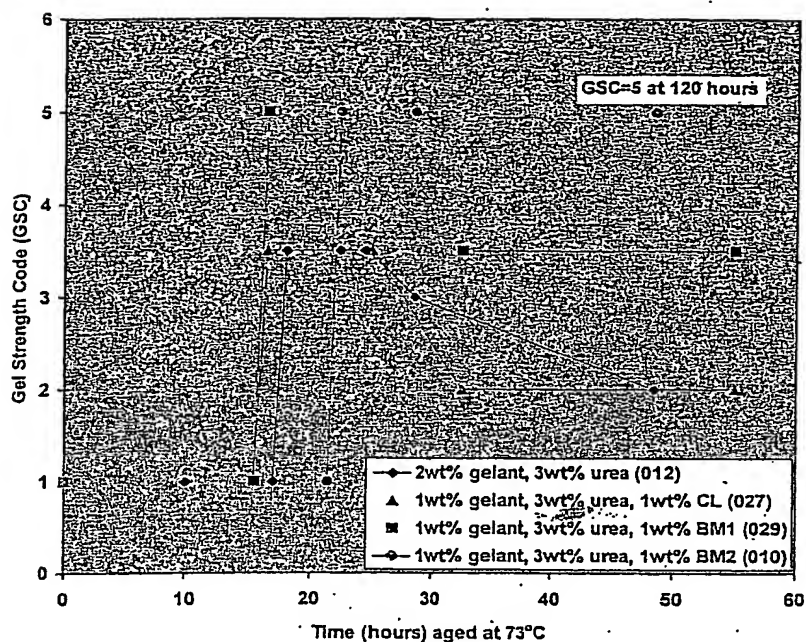


Fig. 24a

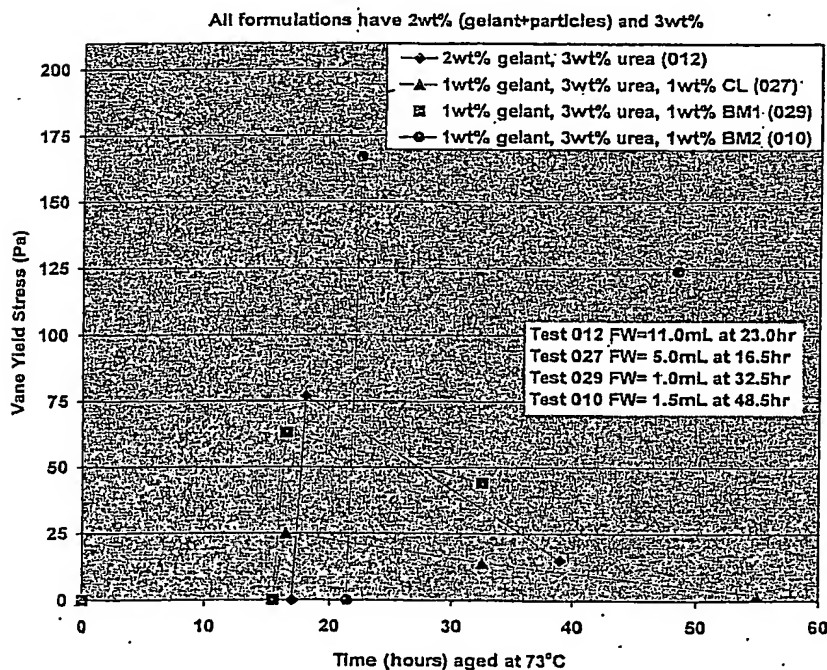


Fig. 24b

Figure D. Gel strength code (GSC) and yield stress as a function of ageing time for formulations containing 2wt% (gelant + particles) and 3wt% urea. (notes: In all cases, the total sample volume is 100mL; FW=free water)

20/24

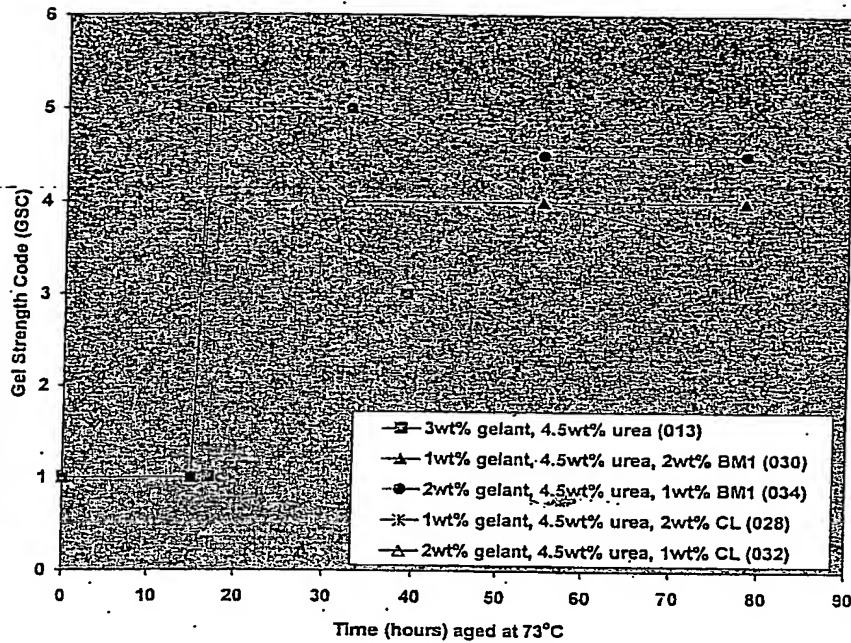


Fig. 24a

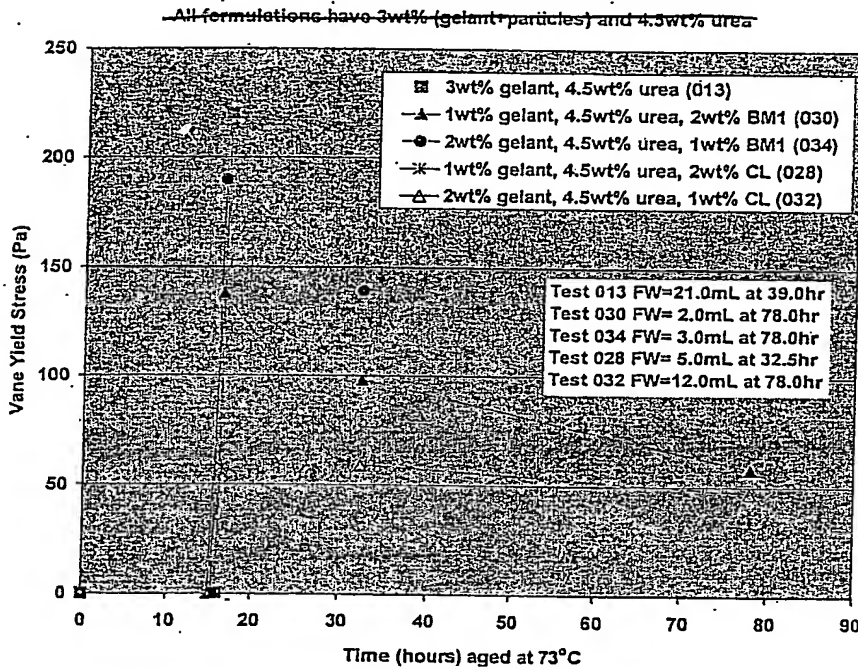


Fig. 24b

Figure E: Gel strength code (GSC) and yield stress as a function of ageing time for formulations containing 3wt% (gelant + particles) and 4.5wt% urea.  
 (notes: In all cases, the total sample volume is 100mL; FW=free water)

21/24

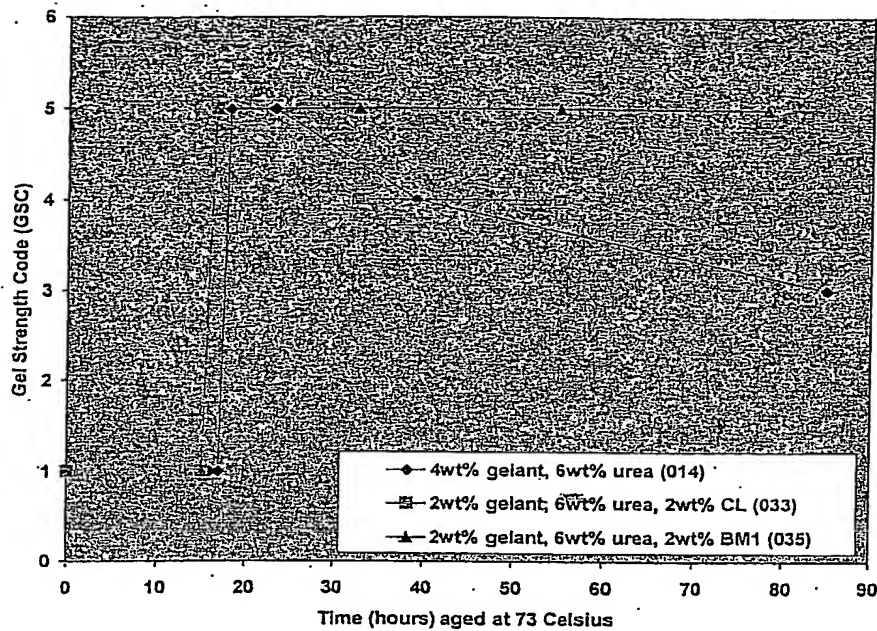


Fig. 28a

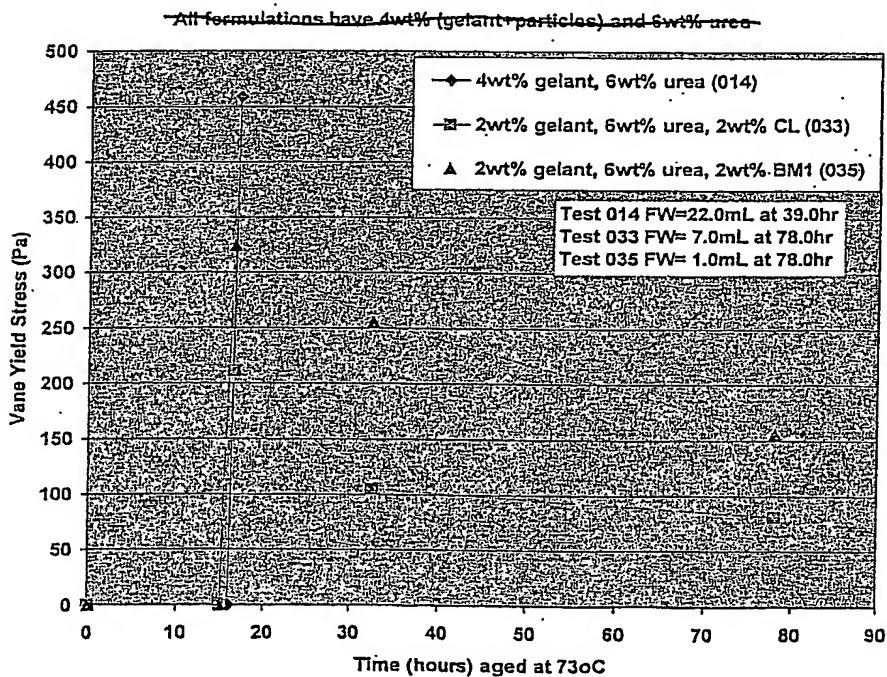


Fig. 28b

Figure F: Gel strength code (GSC) and yield stress as a function of ageing time for formulations containing 4wt% (gelant + particles) and 6wt% urea. (notes: In all cases, the total sample volume is 100mL; FW=free water)



22/24

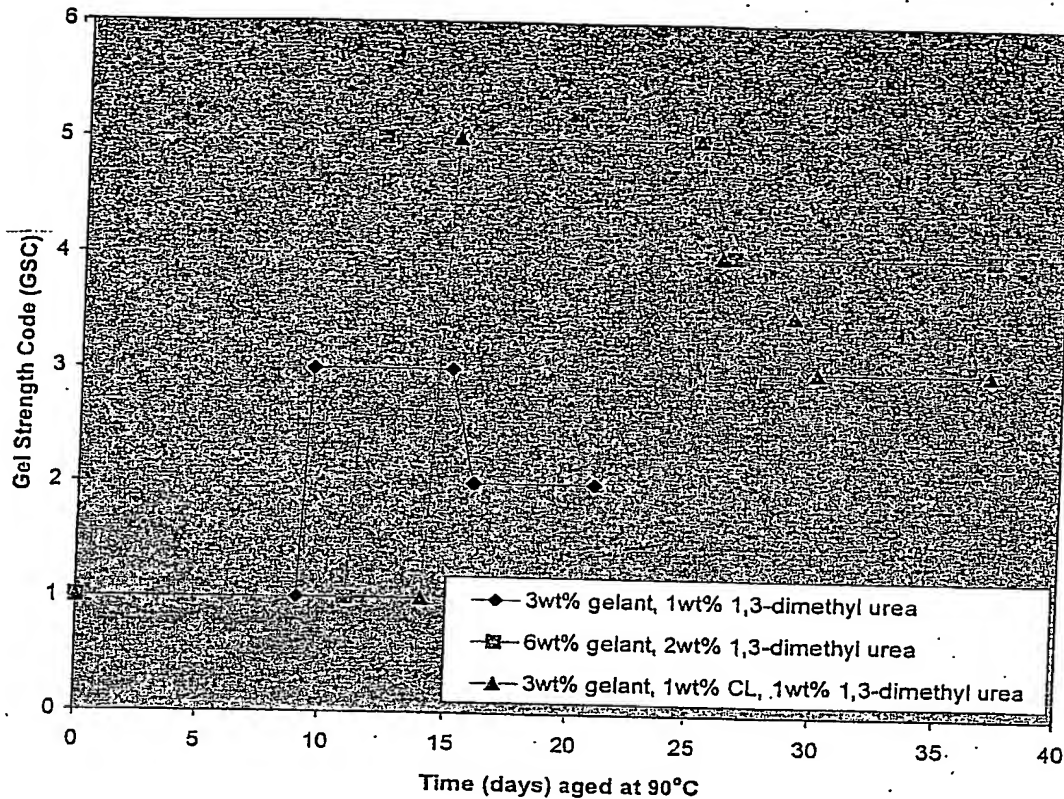


Fig. 276

~~Figure G: Gel strength code (GSC) as a function of ageing time for formulations containing gelant, 1,3-dimethyl urea and CL particles~~

Extra section regarding System 2 (to be inserted after line 16, page 10)

The delayed silicate gelling system used to compare the efficiency of the silica-coated boehmite rods and the colloidal silica particles is based on an aqueous solution of sodium silicate (the gelant) to which is added ammonium sulphate (the activator). The stock sodium silicate solution (supplied by Sigma-Aldrich Company, Gillingham, Dorset, U.K.) contains 14wt% NaOH, 27wt% SiO<sub>2</sub> and 59wt% water. By dilution with deionised water, sodium silicate solutions containing 1, 2 and 4wt% SiO<sub>2</sub> were prepared.

~~Ammonium sulphate was dissolved in the diluted sodium silicate solutions to give the formulations detailed below in Table 2.~~

23/24

SiO <sub>2</sub> (wt%)	Molar ratio SO <sub>4</sub> / SiO <sub>2</sub>
1	0.20
1	0.25
1	0.3
1	0.4
2	0.5
2	0.6
2	0.7
2	0.8
4	0.7
4	1
4	1.5

Table 2: Composition of Delayed Silicate gelling formulations

The fluids detailed in Table 2 were then aged under ambient laboratory conditions (20°C) to form space-filling silicate gels. Figure II shows the observed relationships between gel time and the molar ratio SO<sub>4</sub>/SiO<sub>2</sub>.

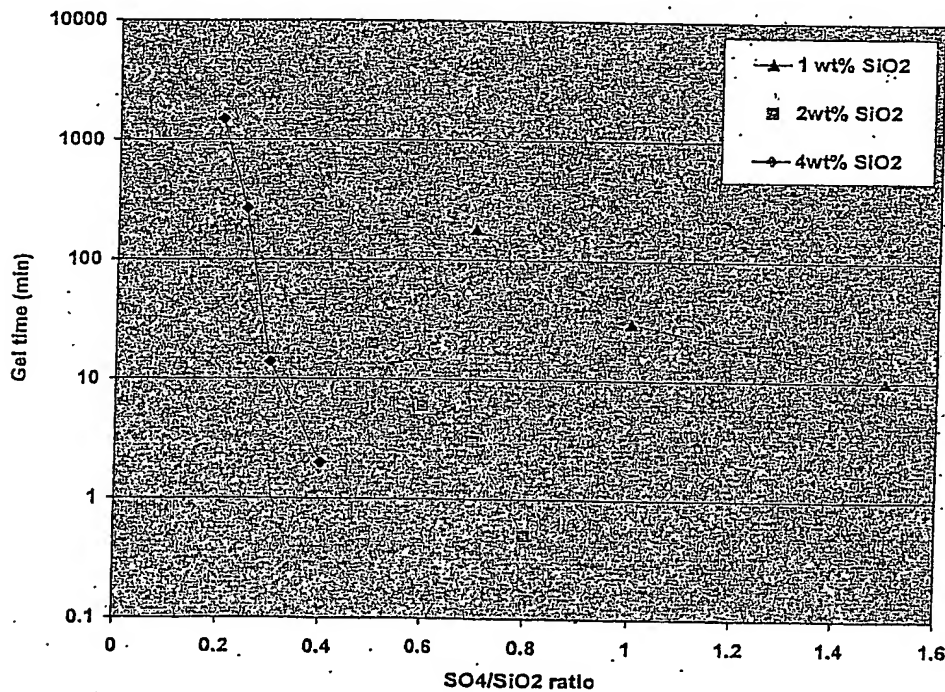


Fig. 287

Figure II: Gel time (minutes) as a function of molar ratio SO<sub>4</sub>/SiO<sub>2</sub> for delayed silicate gelling formulations aged under ambient laboratory conditions (20°C)



The relationships shown in Figure H are consistent with those published in the article "Gelation of sodium silicate: Effect of sulphuric acid, hydrochloric acid, ammonium sulphate and sodium aluminate" by R.C. Merrill and R.W. Spencer, 1949.

The fluid containing 1wt%  $\text{SiO}_2$  with ammonium sulphate added to give a molar ratio  $\text{SO}_4/\text{SiO}_2=1$  forms a gel after 30 minutes (Figure H). This control formulation was used to evaluate the effects of added particles. The spherical silica particles were added in the form of the product Ludox HS-40 (available as a 40wt% suspension from ...; mean particle diameter = 40nm). The rod-like particles were added in the form of silica-coated boehmite, Si-Boeh-100 (shorter rods, length 100nm) and Si-Boeh-200 (longer rods, length 200nm). The relevant data are shown in Figure I. The addition of spherical or rod-like particles accelerates the gelation process such that the observed gel times decrease in the order: no particles > spherical particles > shorter rods > longer rods. After 17 hours, a comparison of the vane yield stress of the gels shows that the presence of the particles enhances gel strength and that the efficiency with which the particles enhance strength decreases in the order: longer rods > shorter rods  $\approx$  spherical particles.

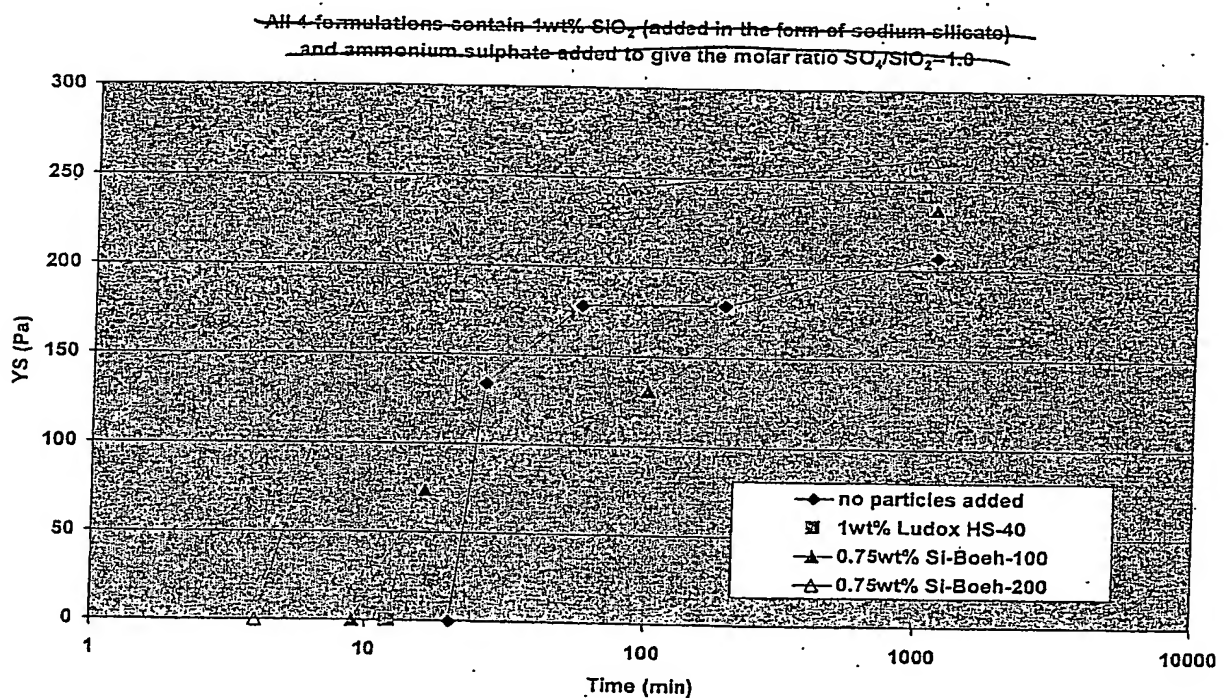


Fig. 2/8

~~Figure I: Vane Yield Stress versus ageing time for delayed silicate gel formulation in the absence and presence of added particles (spherical, shorter rods and longer rods)~~

This Page is inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record

## BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☐ FADED TEXT OR DRAWING
- ☒ BLURED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLORED OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☐ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REPERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning documents *will not* correct images  
problems checked, please do not report the  
problems to the IFW Image Problem Mailbox**